

Этикетки В30, В33

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>

B30- and B33-Series Materials

Benchtop Printers

B30 / B33 Series

B30- and B33-Series Material Supplies

Specifically designed for use with the BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.*



No-hassle, 20-second material changeovers

Forget fumbling around with supplies that roll away or require complicated threading. These easy-to-load materials and ribbons snap into place for easy 20-second material changeovers. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.

Efficient label setup with print smart technology

Your printing team – printer, labels, ribbons and software – all work together from the moment you close the printer cover. It's all in the smart chip embedded in our materials.

When the material is installed, the chip sends vital information such as size, type, color and remaining quantity right to the printer. You'll be ready to print in no time.

Smart chip auto populates:

- Label size and color
- Pre-printed headers
- Remaining material quantity

No wasting labels with auto calibration

The auto calibration that takes place as soon as material is installed, means that you'll be printing on the very first label, saving you valuable time and labels.

*Supplies listed on the following pages are compatible unless otherwise noted in the part number tables.

The right label from the right company

Nothing leaves Brady's doors without meeting the highest quality standards. Backed by more than 100 years of identification experience and rigorous R&D testing, Brady manufactures materials you can trust.

That strong background of material development allows us to create materials for all of your applications throughout your facility. Add the printing versatility of a Brady printer, and you get a convenient tool for facility-wide identification that offers more than 825 parts and 70 material options, and additional custom label options for a variety of applications, including:

Safety, maintenance and facility applications



Arc Flash Labels



GHS Labels



Safety Labels



Pipe Markers



Inventory ID



Tags



Raised Panel Labels



Floor Marking

Specialty applications with the BradyPrinter i3300



Product ID



Wire and cable markers



Electronics and PC boards



Laboratory labels

Cut-out shapes and text with the BBP®37 Printer



Cut-out text



Cut-out shapes




Look for the scissors icon on the following pages for 4 inch wide materials that are compatible with the BBP37 XY-plotter cutter.

(Cut-out text must be 0.75 in. or larger.)

B30- and B33-Series Materials

Rigid sign and tag techniques:

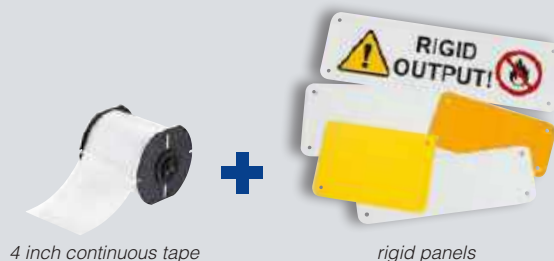

4 inch continuous tape

rigid panels

Blank Rigid Signs

- Create rigid signs and labels with any adhesive-backed output
- Ideal for surfaces where applying an adhesive label is difficult
- Panels can be mounted using foam tape, magnetic strips or by their included pre-drilled corner holes

Blank rigid signs

Color	Panel Height Inch	Panel Length Inch	Aluminum 10/Pack	Plastic 10/Pack
White	2.50	6.25	146083	146076
White	2.50	10.25	146113	146077
White	4.25	6.25	13629	13620
White	4.25	10.25	106461	146074
White	4.25	14.25	146082	146075
Yellow	2.50	6.25	146116	146080
Yellow	2.50	10.25	146117	146081
Yellow	4.25	6.25	13630	13620
Yellow	4.25	10.25	146114	146078
Yellow	4.25	14.25	146115	146079
Orange	4.25	6.25	13631	13622



White die-cut label

Blank tag

Blank Rigid Valve Tags

Print labels on your Brady printer and apply them to industrial-grade plastic tags

- Die-cut labels are sized to fit the recessed area on the tag
- Outdoor tag withstands temperatures -40° F to 180° F

Blank rigid valve tags

Catalog #	Color	Tag Size Inch	Recessed Area Inch
87696	White	2.1 x 3.6	1.5 x 3
87697	White	3.1 x 4.6	2.5 x 4
41922	Yellow	2.1 x 3.6	1.5 x 3
41923	Yellow	3.1 x 4.6	2.5 x 4
41924	Red	2.1 x 3.6	1.5 x 3
41925	Red	3.1 x 4.6	2.5 x 4
41926	Blue	2.1 x 3.6	1.5 x 3
41927	Blue	3.1 x 4.6	2.5 x 4
41928	Green	2.1 x 3.6	1.5 x 3
41929	Green	3.1 x 4.6	2.5 x 4
87694	Orange	2.1 x 3.6	1.5 x 3
87695	Orange	3.1 x 4.6	2.5 x 4
87712	Tan	2.1 x 3.6	1.5 x 3
87713	Tan	3.1 x 4.6	2.5 x 4
87710	Brown	2.1 x 3.6	1.5 x 3
87711	Brown	3.1 x 4.6	2.5 x 4
87698	Gray	2.1 x 3.6	1.5 x 3
87699	Gray	3.1 x 4.6	2.5 x 4
41920	Black	2.1 x 3.6	1.5 x 3
41921	Black	3.1 x 4.6	2.5 x 4
142133	Variety Pack*	-	-

*Pack of 30 tags includes at least one of each size and color. Perfect for evaluating which sizes and colors you need.

Printing supplies

Fits Printers	Catalog #	Color	Label Size	Labels per Roll
All*	B30-242-595-BLNKWT	White	1.125 in. x 2.75 in. for small tag	300
All*	B30-219-595-BLNKWT	White	2.25 in. x 3.75 in. for large tag	250
All*	B30-R10000	Black	Print Ribbon	-

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

BBP®37 printer “cutter” labeling techniques



4 inch
continuous
tape

Paneled
ribbon

Gauge App
on BBP37 printer

Transfer tape for
proper alignment
during application

Circle Gauge Labels with the BBP®37 Printer

The XY cutter and built-in Circle Gauge App on the BBP37 printer make it easy to create gauge labels. The app allows you to:

- Create in-zone, out-of-zone, caution zone or all three
- Specify center hole size

How to: Use multi-color ribbons, 4 in. white continuous tape and the XY cutter on the BBP37 printer to print and cut out a circular label for your gauge. Transparent transfer tape then makes it easy to cleanly apply the label in the proper position on your gauge.

Printing supplies – requires BBP37 printer

Catalog #	Color	
B30C-4000-595-WT	White vinyl	4.0 in. x 100 ft.
B30-R10000-GR-8	Green, red ribbon	
B30-R10000-KRYG-8	Black, red, yellow and green ribbon	
B30-R10000-KRGB-8	Black, red, blue and green ribbon	
76737	transfer tape	4.25 in. x 300 ft



2.25 inch
continuous tape

Gradient App
on printer

Gradient “Ruler” Labels with BBP35 or BBP37 Printers

Create accurate scale or “ruler” labels using the built-in Gradient Label App on the printer with continuous tapes.

The app allows you to:

- Specify units in inches or millimeters
- Choose from several interval tick mark options
- Designate “zones” through multiple color printing
- Set specific starting point

How to: Use any continuous tape along with the built-in Gradient Label App on the BBP35 and BBP37 printers.

Printing supplies – requires BBP35 or BBP37

Catalog #	Color	Size
B30C-4000-595-WT	White vinyl	4.0 in. x 100 ft.
B30C-2250-595-WT	White vinyl	2.25 in. x 100 ft.
B30C-1125-595-WT	White vinyl	1.125 in. x 100 ft.
B30C-500-595-WT	White vinyl	0.50 in. x 100 ft.
B30C-4000-595-YL	Yellow vinyl	4.0 in. x 100 ft.
B30C-2250-595-YL	Yellow vinyl	2.25 in. x 100 ft.
B30C-1125-595-YL	Yellow vinyl	1.125 in. x 100 ft.
B30C-500-595-YL	Yellow vinyl	0.50 in. x 100 ft.
B30-R10000	Black ribbon	
B30-R10000-RD	Red ribbon	
B30-R10000-KR-8	Black, red ribbon	
B30-R10000-KRGB-8	Black, red, green and blue ribbon	
B30-R10000-KRYG-8	Black, red, yellow and green ribbon	

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Indoor and Outdoor Vinyl (B-595)

Continuous vinyl material is ideal for lean / 5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, good for rough surfaces and outdoor use.

Service temp: -40° F to 180° F
Application temp: 0° F to 180° F
Average outdoor durability: 8-10 years
Agency approvals: **RoHS**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-WT	B-595	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-WT	B-595	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-YL	B-595	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-YL	B-595	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-YL	B-595	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-RD	B-595	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-RD	B-595	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BL	B-595	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BL	B-595	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-GN	B-595	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-GN	B-595	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-OR	B-595	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-OR	B-595	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OR	B-595	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OR	B-595	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-BK	B-595	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BK	B-595	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BK	B-595	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BK	B-595	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BR	B-595	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BR	B-595	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BR	B-595	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BR	B-595	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-OC	B-595	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OC	B-595	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OC	B-595	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GD	B-595	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GD	B-595	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GD	B-595	Gold	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GD	B-595	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GY	B-595	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GY	B-595	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GY	B-595	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GY	B-595	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-PL	B-595	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-PL	B-595	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-PL	B-595	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-PL	B-595	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-CL	B-595	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-CL	B-595	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-CL	B-595	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-CL	B-595	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

U.S. Patent No. 5,823,689; 6,570,602. Additional patents pending.

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Low-Halide Polyester (B-569)

Low-halide content for labeling stainless steel pipes and surfaces.
Applies best to very smooth surfaces and ideal for mounting to rigid panels.

Service temp: -40° F to 212° F
Application temp: 0° F to 212° F
Average outdoor durability: 3-5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-569-WT	B-569	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-WT	B-569	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-WT	B-569	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-569-WT	B-569	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-WT	B-569	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-YL	B-569	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-YL	B-569	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-YL	B-569	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-YL	B-569	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-RD	B-569	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-RD	B-569	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-RD	B-569	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-RD	B-569	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BL	B-569	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BL	B-569	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BL	B-569	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BL	B-569	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-LB	B-569	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-LB	B-569	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-LB	B-569	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-LB	B-569	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-SB	B-569	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-SB	B-569	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-SB	B-569	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-SB	B-569	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GN	B-569	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-GN	B-569	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-GN	B-569	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-GN	B-569	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OR	B-569	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OR	B-569	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OR	B-569	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OR	B-569	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-BK	B-569	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BK	B-569	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BK	B-569	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BK	B-569	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BR	B-569	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BR	B-569	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BR	B-569	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BR	B-569	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OC	B-569	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OC	B-569	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OC	B-569	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OC	B-569	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-TN	B-569	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-TN	B-569	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-TN	B-569	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-TN	B-569	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GY	B-569	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-GY	B-569	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-GY	B-569	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-GY	B-569	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-PL	B-569	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-PL	B-569	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-PL	B-569	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-PL	B-569	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-PK	B-569	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-PK	B-569	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-PK	B-569	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-PK	B-569	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-CL	B-569	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-CL	B-569	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-CL	B-569	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-CL	B-569	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Pre-Printed GHS / CLP Chemical Labels (B-569 and B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce two-color GHS / CLP labels in one print pass
- Three sizes of labels, each with diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -4° F to 180° F
Application temp: 50° F to 180° F
Average outdoor durability: 3-5 years



Fits Printers	Catalog #	B#	Material	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-569-CLP4B	B-569	Polyester		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-18-7569-CLP4C	B-7569	Vinyl		L4C Diamond + Text	1.000 (25.4)	3.000 (76.2)	1000	B30-R10000

Easily design GHS labels with the Brady Workstation GHS App

- Select from built-in pre-formatted label layouts with GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes



*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Pre-Printed Right-To-Know Chemical Labels (B-595)

- Pre-printed labels result in 5-color chemical labels in a single print pass
- Indoor / outdoor grade vinyl withstands exposure to moisture, chemicals and handling

Service temp: -40° F to 180° F

Application temp: 0° F to 180° F

Average outdoor durability: 8 to 10 years

Agency approvals: **RoHS**



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon	
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-NFPA	B-595		Diamond + Text	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-NFPA	B-595		Diamond + Text	2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-NFPA	B-595		Diamond + Text	4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-DIAM	B-595		Diamond Only	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-161-595-DIAM	B-595		Diamond Only	4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-NFR	B-595		Diamond NFR	1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-CB	B-595		Color Bar + Text	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-CB	B-595		Color Bar + Text	2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-CB	B-595		Color Bar + Text	4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-HMIG	B-595		Color Bar Only	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-HMIG	B-595		Color Bar HMIG	1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

Labels above are not compatible with BradyPrinter S3000 or BBP30 printers.

B30- and B33-Series Materials

Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor / outdoor grade vinyl conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40° F to 180° F

Application temp: 0° F to 180° F

Average outdoor durability: 8-10 years

Agency approvals: RoHS




Figure 70




Figure 82



Blank rigid valve tags on page 38

Fits Printers	Figure	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	Fig. 70	B30-241-595-OSHADA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHADA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-OSHACA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHACA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSICA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSICA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSINO	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSINO	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PREC	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PEL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-242-595-BLNKWT	B-595		1.125 (28.6) **	2.750 (69.8)	300	B30-R10000
All*	Fig. 82	B30-241-595-BLNKWT	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-219-595-BLNKWT	B-595		2.250 (57.5) **	3.750 (95.3)	250	B30-R10000
All*	Fig. 82	B30-25-595-BLNKWT	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-241-595-BLNKYL	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-25-595-BLNKYL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000

** Sized to fit blank rigid valve tags, see page 38.

Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut or continuous styles
- Pre-cut style tags micro-perforated between tags to separate cleanly and feature chamfered corners
- Snap-in plastic grommets available for extra strength around mounting hole (Catalog #20596, 100/bag)

Service temp: -40° F to 193° F

Average outdoor durability: Up to 2 years




Figure 3




Figure 69



Fits Printers	Figure	Catalog #	B#	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Roll	Rec. Ribbon
All*	Fig. 69	B30-255-551-ANSIDA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-OSHADA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-ANSICA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-WHT	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 3	B30C-2500-551-WT	B-551		2.500 (63.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3250-551-WT	B-551		3.250 (82.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4250-551-WT	B-551		4.250 (107.9)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

ToughWash® Washdown Resistant Labels (B-854 and B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

Service temp: -40° F to 230° F

Agency approvals: RoHS




Figure 3




Figure 73



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
ToughWash Metal Detectable Material (B-854):								
All*	Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PEL	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PREC	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
ToughWash Material (B-855):								
All*	Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PEL	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PREC	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Chemical and Solvent Resistant Polypropylene Labels (B-425, B-7425)

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

B-425: Service temp: -94° F to 212° F
B-7425: Service temp: -320° F to 248° F
Agency approvals:




Figure 1




Figure 2




Figure 25



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 25	B33-88-7425	B-7425	White	1.000 (25.4)	0.750 (19.1)	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-179-7425	B-7425	White	1.000 (25.4)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 25	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	2	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-136-7425	B-7425	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-235-7425	B-7425	White	1.500 (38.1)	1.000 (25.4)	1	1250	B30-R4300
i3300, BBP33	Fig. 2	B33-258-7425	B-7425	White	1.500 (38.1)	1.750 (44.5)	1	900	B30-R4300
i3300, BBP33	Fig. 2	B33-53-7425	B-7425	White	2.000 (50.8)	0.500 (12.7)	1	2000	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40° F to 158° F
Application temp: 0° F to 158° F (yellow and orange), 50° F to 158° F (silver)
Average outdoor durability: 4 to 6 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-584-SL	B-584	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-SL	B-584	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4000-584-SL	B-584	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-YL	B-584	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-YL	B-584	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4000-584-YL	B-584	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-OR	B-584	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-OR	B-584	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4000-584-OR	B-584	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- For glow-in-the-dark identification up to 10 hours
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40° F to 140° F
Application temp: 40° F to 140° F




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-526	B-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-526	B-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4000-526	B-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable and Lean / 5S identification applications

Service temp: 0° F to 158° F
Average outdoor durability: 3 to 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-2500-509-WT	B-509	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-WT	B-509	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2500-509-YL	B-509	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-YL	B-509	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000

Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as Lean / 5S inventory labels

Service temp: -40° F to 180° F
Application temp: 50° F to 180° F
Average outdoor durability: 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-581-WT	B-581	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-WT	B-581	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-WT	B-581	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-WT	B-581	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-581-YL	B-581	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-YL	B-581	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-YL	B-581	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-YL	B-581	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling glassware, temporary asset tracking, animal housing identification and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue

Service temp: -40° F to 172° F




Figure 3



Dissolves within 30 seconds leaving no residue.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-403-WT	B-403	White	1.125 (28.575)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-2250-403-WT	B-403	White	2.250 (57.15)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-3000-403-WT	B-403	White	3.000 (76.2)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-4000-403-WT	B-403	White	4.000 (101.6)	100 (30.5)	1 (cont.)	B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

General ID Labels for Lean / 5S, Bins and Production Areas (B-483, B-484A, B-498, B-499 and B-595)

- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F
 B-484A: Service temp: -40° F to 240° F
 B-498: Service temp: -40° F to 175° F
 B-499: Service temp: -40° F to 193° F
 B-595: Service temp: -40° F to 180° F

Agency approvals:
 Agency approvals:
 Agency approvals:
 Agency approvals:
 Agency approvals:



Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl cloth with ggressive but repositionable adhesive (B-498):									
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200
S3000, S3100, i3300, BBP35, BBP37	Fig. 1	B30C-4000-498	B-498	White	4.000 (101.6)	80 ft. (24.4 m)	1 roll (cont.)		B30-R6200
Nylon Cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low-surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Continuous cut-to-length vinyl with permanent adhesive is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 3	B30C-500-595-WT	B-595**	White	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595**	White	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595**	Yellow	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595**	Yellow	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000

** Additional sizes and colors available for B-595 on page 40.

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
 BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40° F to 212° F

Average outdoor durability: Up to 1 year




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-549-WT	B-549	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-WT	B-549	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-WT	B-549	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-549-YL	B-549	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-YL	B-549	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-YL	B-549	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

ToughStripe® Printable Floor Marking Tape (B-483 with overlaminates)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Each roll ships with a roll of clear overlaminate which must be applied over printed label for best performance

Service temp: -40° F to 248° F

Agency approvals:




Figure 3



For use with printer*	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

ToughStripe material is not compatible with BBP®30, BBP®33 and BBP®31 printers.

ToughStripe material also available as:

- Solid, striped and dashed tape
- Die-cut shape, numbers and letters

View page 295 for more additional products.



✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Raised Profile - Engraved Plate Substitute Labels (B-593)

Push Button Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole diameters)

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:   




Figure 18a




Figure 18b
(without key hole)



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Diameter C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18a	B30EP-167-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-WT	B-593	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-WT	B-593	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-WT	B-593	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-YL	B-593	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-YL	B-593	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-YL	B-593	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-BK	B-593	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-BK	B-593	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-BK	B-593	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-GN	B-593	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-GN	B-593	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-GN	B-593	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-RD	B-593	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-RD	B-593	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-RD	B-593	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Raised Profile - Engraved Plate Substitute Labels (B-593)

Rectangular Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- Ideal for inside-panel backer board labels and front-of-enclosure labeling

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:   





Figure 18c



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-WT	B-593	White	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-WT	B-593	White	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-WT	B-593	White	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-WT	B-593	White	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-WT	B-593	White	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-WT	B-593	White	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-YL	B-593	Yellow	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-YL	B-593	Yellow	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-YL	B-593	Yellow	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-YL	B-593	Yellow	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-YL	B-593	Yellow	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-YL	B-593	Yellow	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-YL	B-593	Yellow	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-BK	B-593	Black	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-BK	B-593	Black	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-BK	B-593	Black	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-BK	B-593	Black	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-BK	B-593	Black	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-BK	B-593	Black	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-GN	B-593	Green	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-GN	B-593	Green	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-GN	B-593	Green	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-GN	B-593	Green	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-GN	B-593	Green	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-GN	B-593	Green	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-GN	B-593	Green	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-RD	B-593	Red	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-RD	B-593	Red	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-RD	B-593	Red	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-RD	B-593	Red	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-SL	B-593	Silver	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-SL	B-593	Silver	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-173-593-SL	B-593	Silver	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-SL	B-593	Silver	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Polyester Labels

(B-422, B-423, B-430, B-432, B-483, B-484A and B-489)

- For product, circuit board and component ID as well as for general purpose industrial identification
- Ideal for textured and curved surfaces

B-423: Service temp: -94° F to 248° F
 B-430: Service temp: -40° F to 212° F
 B-432: Service temp: -40° F to 212° F
 B-483: Service temp: -94° F to 248° F
 B-484A: Service temp: -40° F to 240° F
 B-489: Service temp: -94° F to 248° F

Agency approvals:   
 Agency approvals:   
 Agency approvals:   
 Agency approvals:   
 Agency approvals:   



Figure 1




Figure 2




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):									
i3300, BBP33	Fig. 4	B33-11-423	B-423	Gloss White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-423	B-423	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-423	B-423	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-46-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-423	B-423	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-423	B-423	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-3-423	B-423	Gloss White	1.000 (25.4)	0.375 (9.5)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-423	B-423	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-43-423	B-423	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-29-423	B-423	Gloss White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-423	B-423	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-423	B-423	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-53-423	B-423	Gloss White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-423	B-423	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-423	B-423	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-423	B-423	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-423	B-423	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-423	B-423	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Standard adhesive (B-430 clear):									
i3300, BBP33	Fig. 1	B33-5-430	B-430	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-430	B-430	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-430	B-430	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
Strong adhesive for textured surfaces (B-422 gloss white):									
i3300, BBP33	Fig. 1	B33-149-422	B-422	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-422	B-422	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-147-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	2	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-102-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-422	B-422	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-422	B-422	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-422	B-422	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-422	B-422	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-76-422	B-422	Gloss White	4.000 (101.6)	3.000 (76.2)	1	500	B30-R6000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Polyester Labels (continued)

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Stronger adhesive for textured surfaces (B-432 clear):									
i3300, BBP33	Fig. 1	B33-149-432	B-432	Clear	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-432	B-432	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-432	B-432	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-432	B-432	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-432	B-432	Clear	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 ft. (36.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-483 gloss white):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	Gloss White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-483	B-483	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-489 matte white):									
i3300, BBP33	Fig. 1	B33-5-489	B-489	Matte White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-489	B-489	Matte White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-489	B-489	Matte White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-489	B-489	Matte White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-489	B-489	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A gloss white):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	Gloss White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-484	B-484A	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Permanent acrylic adhesive (B-488 matte white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-488	B-488	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Self-extinguishing polyvinylfluoride (B-787 gloss white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-787	B-787	Gloss White	4.000 (101.6)	60 ft. (18.3 m)	1 roll (cont.)		B30-R6000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Metallized Polyester Labels (B-428, B-434, B-435, B-438, B-486 and B-565)

- For product labeling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish

B-428: Service temp: -40° F to 293° F Agency approvals:   
 B-434: Service temp: -40° F to 194° F Agency approvals:   
 B-435: Service temp: -40° F to 194° F Agency approvals:   
 B-438: Service temp: -40° F to 104° F Agency approvals:   
 B-480: Service temp: -94° F to 248° F Agency approvals:   
 B-486: Service temp: -40° F to 248° F Agency approvals:   
 B-565: Service temp: -40° F to 240° F Agency approvals:   




Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):									
i3300, BBP33	Fig. 1	B33-5-428	B-428	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-428	B-428	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-428	B-428	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-428	B-428	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-428	B-428	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-428	B-428	Matte Silver	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-428	B-428	Matte Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):									
All*	Fig. 3	B30C-1125-565-SL	B-565	Matte Silver	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All*	Fig. 3	B30C-2250-565-SL	B-565	Matte Silver	2.250 (57.5)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All* ✂	Fig. 3	B30C-4000-565-SL	B-565	Matte Silver	4.000 (101.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-435 gloss):									
i3300, BBP33	Fig. 2	B33-18-435	B-435	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-435	B-435	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-435	B-435	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 gloss):									
i3300, BBP33	Fig. 1	B33-5-434	B-434	Gloss Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-434	B-434	Gloss Silver	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-434	B-434	Gloss Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-434	B-434	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-434	B-434	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-434	B-434	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-434	B-434	Gloss Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive with metallic looking finish (B-480 satin):									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):									
i3300, BBP33	Fig. 2	B33-59-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 1	B33-5-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-486	B-486	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-486	B-486	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-7-486	B-486	Matte Silver	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-486	B-486	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-19-486	B-486	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-76-486	B-486	Matte Silver	4.000 (101.6)	3.000 (76.2)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-161-486	B-486	Matte Silver	4.000 (101.6)	4.000 (101.6)	1	250	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 2	B30C-4000-486	B-486	Matte Silver	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R4300

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Tamper-Evident Asset ID Labels (B-438)

Leaves checkerboard footprint on surface and on label if removed to prevent re-use

Service temp: -40° F to 104° F

Agency approvals:   




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 2	B30-17-438	B-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-18-438	B-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-222-438	B-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	650	B30-R4300
All*	Fig. 3	B30C-3000-438-SL	B-438	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)		B30-R4300

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40° F to 124° F

Agency approvals: 




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-53-424	B-424	White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-424	B-424	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-7-424	B-424	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-424	B-424	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-424	B-424	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-20-424	B-424	White	3.000 (76.2)	5.000 (127)	1	250	B30-R4300
i3300, BBP33	Fig. 2	B33-55-424	B-424	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R4300
i3300, BBP33	Fig. 2	B33-25-424	B-424	White	4.000 (101.6)	6.000 (152.4)	1	350	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	✂ Fig. 3	B30C-4000-424	B-424	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300

Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -94° F to 212° F

Agency approvals:    




Figure 1




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

Standard Polyimide Labels (B-724 and B-727)

Top- or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -94° F to 212° F

(short burst max temp: 80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS

B-724: Service temp: -94° F to 518° F

(short burst max temp: 80 sec at 626° F, 5 min at 536° F)

Agency approvals: RoHS




Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):									
i3300, BBP33	Fig. 1	B33-11-727	B-727	Gloss White	0.250 (6.35)	0.250 (6.4)	12	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-727	B-727	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-727	B-727	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-727	B-727	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-2-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-727	B-727	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-58-727	B-727	Gloss White	1.000 (25.4)	0.375 (9.5)	1	4000	B30-R6000
i3300, BBP33	Fig. 2	B33-59-727	B-727	Gloss White	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-43-727	B-727	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-44-727	B-727	Gloss White	1.375 (34.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-727	B-727	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-727	B-727	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-727	B-727	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Extremely high temperature (B-724 matte amber):									
i3300, BBP33	Fig. 1	B33-149-724	B-724	Matte Amber	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-46-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-724	B-724	Matte Amber	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-43-724	B-724	Matte Amber	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-4-724	B-724	Matte Amber	1.500 (38.1)	0.250 (6.4)	2	5000	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-724	B-724	Matte Amber	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Static Dissipative Polyimide Labels (B-717, B-718 and B-719)

- Circuit board and electronic component identification with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 packaging material standards for ESD sensitive items
- For top- or bottom-side component or board identification

Service temp: -94° F to 212° F (short burst max temp:

80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS




Figure 1




Figure 2




Figure 4



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):									
i3300, BBP33	Fig. 2	* B33-46-717	B-717	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-103-717	B-717	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-717	B-717	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-717	B-717	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label (B-718 gloss white):									
i3300, BBP33	Fig. 4	* B33-11-718	B-718	Gloss White	0.250 (6.4)	0.250 (6.4)	12	1500	B30-R6000
i3300, BBP33	Fig. 1	* B33-38-718	B-718	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-149-718	B-718	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-1-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-49-718	B-718	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-718	B-718	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-718	B-718	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-72-718	B-718	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label to prevent sticking of solder balls (B-719 matte white):									
i3300, BBP33	Fig. 1	* B33-38-719	B-719	Matte White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-719	B-719	Matte White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-2-719	B-719	Matte White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-719	B-719	Matte White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Panel ID Labels

(B-483, B-484A, B-499, B-593 and B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F Agency approvals:   
 B-484A: Service temp: -40° F to 240° F Agency approvals:   
 B-499: Service temp: -40° F to 193° F Agency approvals:   
 B-593: Service temp: -4° F to 212° F Agency approvals:   
 B-595: Service temp: -40° F to 180° F Agency approvals: 




Figure 1




Figure 2




Figure 3




Figure 18c




Figure 70

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Raised profile polyester with ultra-aggressive adhesive (B-593):									
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
Pre-printed vinyl with permanent adhesive and is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Self-Laminating Wire and Cable Labels (B-427)

- Brady's most popular wire marker
- Features white printable area with clear tail that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40° F to 158° F
Agency approvals:  




Figure 9a




Figure 12




Figure 14




Figure 15

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Print Area Height F Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 12	B33-80-427	B-427	White	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-113-427	B-427	White	0.500 (12.7)	1.000 (25.4)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-8-427	B-427	White	0.500 (12.7)	1.437 (36.5)	0.500 (12.7)	5	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-56-427	B-427	White	0.750 (19.1)	0.937 (23.8)	0.375 (9.5)	4	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-73-427	B-427	White	0.750 (19.1)	1.750 (44.6)	0.500 (12.7)	4	3500	B30-R4300
i3300, BBP33	Fig. 12	B33-74-427	B-427	White	0.800 (20.3)	1.437 (36.5)	0.500 (12.7)	4	4000	B30-R4300
i3300, BBP33	Fig. 12	B33-115-427	B-427	White	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-116-427	B-427	White	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-9-427	B-427	White	1.000 (25.4)	1.437 (36.5)	0.500 (12.7)	3	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-75-427	B-427	White	1.000 (25.4)	2.250 (57.2)	0.750 (19.1)	2	1400	B30-R4300
i3300, BBP33	Fig. 15	B33-131-427	B-427	White	1.000 (25.4)	2.625 (66.7)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 12	B33-10-427	B-427	White	1.000 (25.4)	3.750 (95.3)	1.000 (25.4)	3	1200	B30-R4300
i3300, BBP33	Fig. 12	B33-81-427	B-427	White	1.000 (25.4)	6.000 (152.4)	1.500 (38.1)	2	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-135-427AW	B-427	All White*	1.500 (38.1)	0.750 (19.1)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-118-427	B-427	White	1.500 (38.1)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-119-427	B-427	White	1.500 (38.1)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-272-427	B-427	White	1.500 (38.1)	2.250 (57.2)	0.750 (19.1)	1	700	B30-R4300
i3300, BBP33	Fig. 14	B33-120-427	B-427	White	1.750 (44.5)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-121-427	B-427	White	1.750 (44.5)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-273-427	B-427	White	1.750 (44.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-137-427AW	B-427	All White*	2.000 (50.8)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-27-427	B-427	White	2.000 (50.8)	3.750 (95.3)	1.000 (25.4)	1	400	B30-R4300
i3300, BBP33	Fig. 14	B33-26-427	B-427	White	2.500 (63.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 14	B33-82-427	B-427	White	2.000 (50.8)	6.000 (152.4)	1.500 (38.1)	1	200	B30-R4300

* Label is all white and does not have a clear over-laminate.

Zero-Halogen Cable Markers (B-7643)

Thermoplastic polyether polyurethane is a zero-halogen high-density, thermoplastic cable marker designed for dot matrix or thermal-transfer printing.

- Meets the requirements of a halogen-free material per IEC 61249-2-21 (2003-11)
- Excellent chemical, oil and water resistance

Service temp: -40° F to 193° F (-40° C to 90° C)
Agency approvals: 




Figure 61



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 61	B33-6010-7643-WT	B-7643	White	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-WT	B-7643	White	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-WT	B-7643	White	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-WT	B-7643	White	2.95 (75)	0.59 (14.9)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-6010-7643-YL	B-7643	Yellow	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-YL	B-7643	Yellow	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-YL	B-7643	Yellow	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-YL	B-7643	Yellow	2.95 (75)	0.59 (14.9)	500	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

High-Temp Adhesive Topcoated Polyvinylfluoride Wire and Cable Labels (B-437)

- Topcoated polyvinylfluoride label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and fluids
- Meets MIL-M-87958 Standard

Service temp: -94° F to 275° F

Agency approvals: RoHS

Also available in self-laminating format.
Contact Brady to order custom
B-642 material and B30-R4300 ribbon.




Figure 1




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 4	B33-11-437	B-437	White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-437	B-437	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-437	B-437	White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437	B-437	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437	B-437	White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437YL	B-437	Yellow	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437YL	B-437	Yellow	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
Continuous Rolls:									
i3300, BBP33	Fig. 3	B33C-1000-437	B-437	White	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437	B-437	White	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437	B-437	White	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437	B-437	White	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-437	B-437	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1000-437YL	B-437	Yellow	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437YL	B-437	Yellow	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437YL	B-437	Yellow	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437YL	B-437	Yellow	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300

Vinyl Cloth Adhesive Wire and Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable — a highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40° F to 175° F

Agency approvals:




Figure 1



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-91-498	B-498	White	0.750 (19.1)	0.937 (23.8)	4	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

High-Temp Adhesive Polyimide Wire and Cable Labels (B-472)

- Top-coated polyimide label for wire and cable marking applications where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and other fluids

Service temp: -94° F to 320° F
Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 4	B33-11-472	B-472	White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-472	B-472	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-472	B-472	White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-472	B-472	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-472	B-472	White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-472YL	B-472	Yellow	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-472YL	B-472	Yellow	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
Continuous Rolls:									
i3300, BBP33	Fig. 3	B33C-1000-472	B-472	White	1.000 (25.4)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-472	B-472	White	1.500 (38.1)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-472	B-472	White	2.000 (50.8)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-472	B-472	White	3.000 (76.2)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1000-472YL	B-472	Yellow	1.000 (25.4)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-472YL	B-472	Yellow	1.500 (38.1)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-472YL	B-472	Yellow	2.000 (50.8)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-472YL	B-472	Yellow	3.000 (76.2)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300

Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40° F to 175° F
Agency approvals: **UL** **RoHS** **SE**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 3	B33C-312-498	B-498	White	0.312 (7.9)	85 (25.9)	1 roll (cont.)	B30-R6200
i3300, BBP33	Fig. 3	B33C-375-498	B-498	White	0.375 (9.5)	85 (25.9)	1 roll (cont.)	B30-R6200

Patch Panel Adhesive Strips (B-422)

- Continuous supply makes labeling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly-textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40° F to 212° F
Agency approvals: **UL** **RoHS** **SE**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 3	B33C-312-422	B-422	White	0.312 (7.9)	85 (25.9)	1 roll (cont.)	B30-R6000
i3300, BBP33	Fig. 3	B33C-375-422	B-422	White	0.375 (9.5)	85 (25.9)	1 roll (cont.)	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

PermaSleeve® PS Polyolefin Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant.

Meets specifications:

- SSAE-AS-23053/5
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202

Service temp: -40° F to 275° F

(short burst max temp: 5 min at 500° F, 24 hrs at 350° F)

Agency approvals:  RoHS




Figure 20




Figure 20-2
(perforated)



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio, single-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33-94-2-342	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-125-2-342	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-187-2-342	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33-250-2-342	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-375-2-342	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-500-2-342	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33-750-2-342	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1000-2-342	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33-94-2-342YL	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-125-2-342YL	B-342	Ylw.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-187-2-342YL	B-342	Ylw.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33-250-2-342YL	B-342	Ylw.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-375-2-342YL	B-342	Ylw.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-500-2-342YL	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33-750-2-342YL	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1000-2-342YL	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342YL	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342BK	B-342	Blk.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4500-SV
3:1 Shrink ratio, single-side printable, perforated material resulting in two 1 inch width sleeves (dimension A):											
i3300, BBP33	Fig. 20-2	* B33-94-2-342-2	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-125-2-342-2	B-342	Wt.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-187-2-342-2	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	2	1500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-250-2-342-2	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	2	1000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-375-2-342-2	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	2	1000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-500-2-342-2	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-750-2-342-2	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1000-2-342-2	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1500-2-342-2	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	150 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-94-2-342YL-2	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-125-2-342YL-2	B-342	Ylw.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-750-2-342YL-2	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-500-2-342YL-2	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1000-2-342YL-2	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1500-2-342YL-2	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	300 B30-R4300

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

B-342 PermaSleeve® PS Polyolefin Wire Markers (continued)

Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33D-94-2-342	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342-2	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-187-2-342	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33D-250-2-342	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-375-2-342	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-500-2-342	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33D-750-2-342	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1000-2-342	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1500-2-342	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33D-94-2-342YL	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342YL	B-342	Ylw.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-187-2-342YL	B-342	Ylw.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33D-250-2-342YL	B-342	Ylw.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-375-2-342YL	B-342	Ylw.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-500-2-342YL	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33D-750-2-342YL	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1000-2-342YL	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1500-2-342YL	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33D-94-2-342BK	B-342	Blk.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-125-2-342BK	B-342	Blk.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-187-2-342BK	B-342	Blk.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-250-2-342BK	B-342	Blk.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-375-2-342BK	B-342	Blk.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-500-2-342BK	B-342	Blk.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-750-2-342BK	B-342	Blk.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-1000-2-342BK	B-342	Blk.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-1500-2-342BK	B-342	Blk.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4500-SV

QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps – just pick, slip and apply. This tool includes:

- Four specially designed slanted tubes sized for sleeve sizes 0.094, 0.125, 0.187 and 0.250 inches
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver



Catalog #	Description	Qty.
QS	Quicksleeve Multi-Tool	1 Set



Pick



Slip



Apply

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

PermaSleeve® HT High-Temperature PVDF Wire Markers (B-345)

Military / industrial grade 2:1 heat shrinkable sleeves specifically designed for high-temperature and low-vacuum outgassing applications. Irradiated high-temp polyvinylidene fluoride (PVDF) is fade-resistant and flame-retardant.

Meets specifications:

- NASA SP-R-0022A
Outgassing Performance
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202

Service temp: -67° F to 437° F
Agency approvals: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-94-2-345	B-345	Wt.	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R6000
i3300, BBP33	Fig. 20	B33D-94-2-345BK	B-345	Blk.	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R4400-WT
2:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-125-2-345	B-345	Wt.	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-345	B-345	Wt.	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750 B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-345	B-345	Wt.	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-345	B-345	Wt.	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-345	B-345	Wt.	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350 B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-345	B-345	Wt.	2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250 B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-345	B-345	Wt.	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250 B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-345	B-345	Wt.	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150 B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-345BK	B-345	Blk.	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-187-2-345BK	B-345	Blk.	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-250-2-345BK	B-345	Blk.	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-375-2-345BK	B-345	Blk.	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-500-2-345BK	B-345	Blk.	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-750-2-345BK	B-345	Blk.	3 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-1000-2-345BK	B-345	Blk.	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-1500-2-345BK	B-345	Blk.	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150 B30-R4400-WT

Print double-sided wire sleeves with the BradyPrinter i3300 Industrial Label Printer

You can quickly create double-sided sleeve by using "B33D-" parts and Brady Workstation's two-sided print feature.

Once the first side of your print job is complete, the software prompts you to cut the media and re-insert it for a second print pass.



*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

PermaSleeve® HX Polyolefin Wire Markers (B-7642)

Military / industrial 2:1 heat-shrinkable sleeves are flame-retardant and high-temperature rated but not as high-temperature as B-345 HT sleeves.

Meets specifications:

- SAE-AS23053/5
- SAE-AS-81531

Tested per:

- ASTM E162 and ASTM E662
- MIL-STD-202

Service temp: -40° F to 248° F (short burst max temp: 5 min at 464° F, 24 hrs at 320° F)

Agency approval: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio, single-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33-94-2-7642	B-7642	Wt. 24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33-125-2-7642	B-7642	Wt. 20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33-187-2-7642	B-7642	Wt. 16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
i3300, BBP33	Fig. 20	B33-250-2-7642	B-7642	Wt. 12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
i3300, BBP33	Fig. 20	B33-375-2-7642	B-7642	Wt. 8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
i3300, BBP33	Fig. 20	B33-500-2-7642	B-7642	Wt. 6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
i3300, BBP33	Fig. 20	B33-750-2-7642	B-7642	Wt. 2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33-1000-2-7642	B-7642	Wt. 2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33-1500-2-7642	B-7642	Wt. N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
i3300, BBP33	Fig. 20	B33-2000-2-7642	B-7642	Wt. N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300
2:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-94-2-7642	B-7642	Wt. 24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33D-125-2-7642	B-7642	Wt. 20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33D-187-2-7642	B-7642	Wt. 16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
i3300, BBP33	Fig. 20	B33D-250-2-7642	B-7642	Wt. 12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
i3300, BBP33	Fig. 20	B33D-375-2-7642	B-7642	Wt. 8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
i3300, BBP33	Fig. 20	B33D-500-2-7642	B-7642	Wt. 6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
i3300, BBP33	Fig. 20	B33D-750-2-7642	B-7642	Wt. 2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33D-1000-2-7642	B-7642	Wt. 2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33D-1500-2-7642	B-7642	Wt. N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
i3300, BBP33	Fig. 20	B33D-2000-2-7642	B-7642	Wt. N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300

PermaSleeve® LSZH Low-Smoke Zero-Halogen Polyolefin Wire Markers (B-7641)

Low-halogen, 2:1 heat-shrinkable sleeves offer outstanding fire safety properties and minimal smoke emission.

Meets specifications:

- SAE-AS-81531
- EN45545-2

Tested per:

- ASTM E162 and ASTM E662
- MIL-STD-202

Service temp: -22° F to 221° F

Agency approval: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio double-side printable, 2 inch sleeve width (dimension A):										
i3300, BBP33	Fig. 20	B33D-94-2-7641	B-7641	Wt. 0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-7641	B-7641	Wt. 0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-7641	B-7641	Wt. 0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-7641	B-7641	Wt. 0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-7641	B-7641	Wt. 0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-7641	B-7641	Wt. 0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-7641	B-7641	Wt. 0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-7641	B-7641	Wt. 0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-7641	B-7641	Wt. 0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R6000
i3300, BBP33	Fig. 20	B33D-94-2-7641Y	B-7641	Ylw. 0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-7641Y	B-7641	Ylw. 0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-7641Y	B-7641	Ylw. 0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-7641Y	B-7641	Ylw. 0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-7641Y	B-7641	Ylw. 0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-7641Y	B-7641	Ylw. 0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-7641Y	B-7641	Ylw. 0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-7641Y	B-7641	Ylw. 0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-7641Y	B-7641	Ylw. 0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

PermaSleeve® FR Fluid-Resistant Wire Markers (B-344)

Military / industrial grade 3:1 heat-shrinkable sleeves are specifically designed for applications with exposure to fuels, lubricants and harsh chemicals such as in the installation of hydrogen fuel cells for aerospace. These sleeves are resistant to harsh chemicals including, JP8 Jet Fuel, Skydrol and DOT 3 brake fluid.

Meets specification:

- SAE-AS23053/5

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202G

Service temp: -94° F to 275° F

Agency approvals: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33D-94-2-344	B-344	Wt. 28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6600
i3300, BBP33	Fig. 20	* B33D-125-2-344	B-344	Wt. 22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6600
i3300, BBP33	Fig. 20	* B33D-187-2-344	B-344	Wt. 20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6600
i3300, BBP33	Fig. 20	* B33D-250-2-344	B-344	Wt. 16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
i3300, BBP33	Fig. 20	* B33D-375-2-344	B-344	Wt. 12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
i3300, BBP33	Fig. 20	* B33D-500-2-344	B-344	Wt. 8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6600
i3300, BBP33	Fig. 20	* B33D-750-2-344	B-344	Wt. 6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6600
i3300, BBP33	Fig. 20	* B33D-1000-2-344	B-344	Wt. 2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6600
i3300, BBP33	Fig. 20	* B33D-1500-2-344	B-344	Wt. n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6600
i3300, BBP33	Fig. 20	* B33D-94-2-344YL	B-344	Ylw. 28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6600
i3300, BBP33	Fig. 20	* B33D-125-2-344YL	B-344	Ylw. 22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6600
i3300, BBP33	Fig. 20	* B33D-187-2-344YL	B-344	Ylw. 20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6600
i3300, BBP33	Fig. 20	* B33D-250-2-344YL	B-344	Ylw. 16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
i3300, BBP33	Fig. 20	* B33D-375-2-344YL	B-344	Ylw. 12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
i3300, BBP33	Fig. 20	* B33D-500-2-344YL	B-344	Ylw. 8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6600
i3300, BBP33	Fig. 20	* B33D-750-2-344YL	B-344	Ylw. 6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6600
i3300, BBP33	Fig. 20	* B33D-1000-2-344YL	B-344	Ylw. 2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6600
i3300, BBP33	Fig. 20	* B33D-1500-2-344YL	B-344	Ylw. n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6600
i3300, BBP33	Fig. 20	* B33D-94-2-344BK	B-344	Blk. 28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-125-2-344BK	B-344	Blk. 22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-187-2-344BK	B-344	Blk. 20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-250-2-344BK	B-344	Blk. 16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-375-2-344BK	B-344	Blk. 12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-500-2-344BK	B-344	Blk. 8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-750-2-344BK	B-344	Blk. 6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-1000-2-344BK	B-344	Blk. 2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-1500-2-344BK	B-344	Blk. n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6700-WT

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Color Polyester Labels (B-494)

- Adding color to labels reduces errors, increase efficiency and differentiates your lab samples
- Color printed below the label surface withstands the harshest lab environments, including liquid nitrogen, hot water baths and more
- Labels are resistant to common lab chemicals, like ethanol and xylene, when printed with the R6400 series ribbon

Service temp: -320° F to 70° F

Agency approvals: **RoHS**




Figure 2




Figure 24




Figure 25



Note: Label dimensions include the color area.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vial Top Dia. C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 25	B33-152-494-BL	BBP33	Lt. Blue	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-BL	BBP33	Lt. Blue	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-BL	BBP33	Lt. Blue	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-GN	BBP33	Green	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-GN	BBP33	Green	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-GN	BBP33	Green	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-OR	BBP33	Orange	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-OR	BBP33	Orange	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-OR	BBP33	Orange	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-PK	BBP33	Pink	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-PK	BBP33	Pink	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-PK	BBP33	Pink	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-RD	BBP33	Red	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-RD	BBP33	Red	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-RD	BBP33	Red	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-YL	BBP33	Yellow	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-YL	BBP33	Yellow	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-YL	BBP33	Yellow	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400

Sterilization Indicating Labels (B-7425-AC)

- Pre-printed STERILIZED header indicates steam sterilization when autoclaved at 250.7° F (121.5° C) for 10 minutes
- Labels withstand temperature ranges from -320° F to 248° F (-196° C to 121° C)
- For use in LN2, freezers, autoclave and hot water baths
- Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

Service temp: -112° F to 158° F

Agency approvals: **RoHS**




Figure 81



Note: Label dimensions include the STERILIZED indicating area.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 81	B33-235-7425-AC	B-7425-AC	White	1.500 (38.1)	1.000 (25.4)	1	1250	B30-R4300
i3300, BBP33	Fig. 81	B33-137-7425-AC	B-7425-AC	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Cryogenic Tube and Vial Labels (B-461, B-490, B-492 and B-7425)

FreezerBondz™ labels can be applied to room temperature or already frozen samples, with a small overlap. The label remains legible and will stick to the tube during processing, even when immersed in liquid or vapor-phase nitrogen and ultra-low temperature freezer storage.

- B-461 Self-Laminating Polyester: Ultra-thin label with clear overlaminate tail that protects print and allows liquid levels to be visible
- B-490 Polyester: Adhere to already frozen tubes and vials when wrapped around itself by at least 0.125 inch
- B-492 Polyester: Ultra-thin label for frosted, frozen or room temperature vials, tubes and canes. Superior chemical and abrasion resistance
- B-7425 Polypropylene: Ideal for labeling dry, room temperature specimen containers. Material withstands temperature ranges from -320° F to 248° F (-196° C to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

B-461: Service temp: -321° F to 230° F

B-490: Service temp: -320° F to 366° F

B-492: Service temp: -320° F to 230° F

B-7425: Service temp: -112° F to 158° F

Agency approvals:

RoHS

RoHS

RoHS

RoHS




Figure 2




Figure 5




Figure 7




Figure 14c




Figure 15c




Figure 25a

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Print-On Height C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Self-Laminating Polyester (B-461):										
i3300, BBP33	Fig. 15c	B33-127-461	B-461	White	0.500 (12.7)	2.200 (55.9)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-133-461	B-461	White	0.600 (15.2)	1.625 (41.3)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 14c	B33-139-461	B-461	White	1.000 (25.4)	5.250 (133.4)	1.500 (38.1)	2	650	B30-R4300
i3300, BBP33	Fig. 15c	B33-123-461	B-461	White	1.800 (45.7)	0.375 (9.5)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-122-461	B-461	White	1.800 (45.7)	0.500 (12.7)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 14c	B33-276-461	B-461	White	2.625 (66.7)	1.000 (25.4)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-134-461	B-461	White	3.500 (88.9)	1.500 (38.1)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 15c	B33-153-461	B-461	White	0.600 (15.2)	2.625 (66.7)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-183-461	B-461	White	1.750 (44.4)	1.000 (25.4)	1.000 (25.4)	1	2000	B30-R4300
Polyester (B-490):										
i3300, BBP33	Fig. 5	B33-144-490	B-490	White	0.500 (12.7) dia.	-	-	3	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-68-490	B-490	White	0.500 (12.7)	0.750 (19.1)	-	4	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-125-490	B-490	White	0.900 (22.9)	0.500 (12.7)	-	1	1650	B30-R4300
i3300, BBP33	Fig. 7	B33-126-490	B-490	White	0.900 (22.9)	0.500 (12.7)	0.500 (12.7) dia.	1	2500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-154-490	B-490	White	1.250 (31.8)	0.375 (9.5)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-155-490	B-490	White	1.625 (41.3)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-156-490	B-490	White	1.900 (48.2)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-157-490	B-490	White	2.200 (55.9)	1.500 (38.1)	-	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-158-490	B-490	White	3.750 (95.3)	1.750 (44.4)	-	1	1100	B30-R4300
Polyester (B-492):										
i3300, BBP33	Fig. 5	B33-143-492	B-492	White	0.375 (9.5) dia.	-	-	4	1500	B30-R6400
i3300, BBP33	Fig. 5	B33-144-492	B-492	White	0.500 (12.7) dia.	-	-	3	1500	B30-R6400
i3300, BBP33	Fig. 7	B33-182-492	B-492	White	0.500 (12.7)	1.000 (25.4)	0.440 (11.17) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-180-492	B-492	White	0.900 (22.9)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25a	B33-152-492	B-492	White	1.000 (25.4)	0.375 (9.5)	-	2	2500	B30-R6400
i3300, BBP33	Fig. 7	B33-163-492	B-492	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 7	B33-181-492	B-492	White	1.000 (25.4)	0.500 (12.7)	0.500 (12.7) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-59-492	B-492	White	1.000 (25.4)	0.500 (12.7)	-	1	5000	B30-R6400
i3300, BBP33	Fig. 2	B33-179-492	B-492	White	1.000 (25.4)	1.000 (25.4)	-	1	1900	B30-R6400
i3300, BBP33	Fig. 2	B33-155-492	B-492	White	1.625 (41.3)	0.600 (15.2)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 7	B33-190-492	B-492	White	1.625 (41.3)	0.600 (15.2)	0.375 (9.5) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-156-492	B-492	White	1.900 (48.3)	1.000 (25.4)	-	1	1500	B30-R6400
Polypropylene (B-7425):										
i3300, BBP33	Fig. 2	B33-257-7425	B-7425	White	0.825 (21.0)	0.250 (6.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 25a	B33-152-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-59-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	-	1	2000	B30-R4300
i3300, BBP33	Fig. 25a	B33-88-7425	B-7425	White	1.000 (25.4)	0.750 (19.1)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-256-7425	B-7425	White	1.300 (33.0)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 25a	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	-	2	1500	B30-R4300

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Centrifuge and PCR Tube Labels (B-499 and B-7425)

Designed with ultra-thin material that prevents vials from jamming in centrifuges or racks, these labels withstand harsh temperatures and chemicals without falling off, fading or smearing.

- B-499 Nylon Cloth: White nylon cloth for easy handling and conformability
- B-7425 Polypropylene: Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers that withstand temperature ranges from -320° F to 248° F (-196° C to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

B-499: Service temp: -40° F to 194° F Agency approvals:  RoHS 
B-7425: Service temp: -112° F to 158° F Agency approvals:  RoHS




Figure 2




Figure 5




Figure 7

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vial Top Dia. C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth (B-499):										
i3300, BBP33	Fig. 5	B33-143-499	B-499	White	0.375 (9.5) dia.	-	-	4	1500	B30-R6000
i3300, BBP33	Fig. 5	B33-144-499	B-499	White	0.500 (12.7) dia.	-	-	3	1500	B30-R6000
i3300, BBP33	Fig. 7	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	0.500 (12.7) dia.	1	1500 sets	B30-R6000
Polypropylene (B-7425):										
i3300, BBP33	Fig. 2	B33-257-7425	B-7425	White	0.825 (21.0)	0.250 (6.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-152-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 7	B33-249-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	1	1500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-59-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	-	1	2000	B30-R4300
i3300, BBP33	Fig. 7	B33-251-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	0.440 (11.1) dia.	1	1500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-179-7425	B-7425	White	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-256-7425	B-7425	White	1.300 (33.0)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	-	2	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-136-7425	B-7425	White	1.500 (38.1)	0.750 (19.1)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-258-7425	B-7425	White	1.500 (38.1)	1.750 (44.5)	-	1	900	B30-R4300
i3300, BBP33	Fig. 2	B33-137-7425	B-7425	White	2.000 (50.8)	1.000 (25.4)	-	1	1500	B30-R4300

Microscope Slide Labels (B-481)

- StainerBondz™ polyester material is designed to identify slides and to resist exposure to harsh chemicals during the slide-staining process
- Performs well in stains such as hematoxylin and eosin
- Extreme chemical resistance withstands the rigors of typical deparaffinization, including ethanol, xylene and H&E staining processes

Service temp: -112° F to 266° F
Agency approvals:  RoHS




Figure 2




Figure 25



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-195-481	B-481	White	0.900 (22.9)	0.375 (9.5)	1	3000	B30-R6400
i3300, BBP33	Fig. 2	B33-194-481	B-481	White	0.900 (22.9)	0.750 (19.1)	1	2000	B30-R6400
i3300, BBP33	Fig. 25	B33-141-481	B-481	White	0.900 (22.9)	0.900 (22.9)	2	1500	B30-R6400

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling vials, tubes or general glassware, temporary asset tracking, animal housing identification and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue




Figure 3



Dissolves within 30 seconds leaving no residue.

Service temp: -40° F to 172° F

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-403-WT	B-403	White	1.125 (28.6)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-2250-403-WT	B-403	White	2.250 (57.15)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-3000-403-WT	B-403	White	3.000 (76.2)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-4000-403-WT	B-403	White	4.000 (101.6)	100 (30.5)	1 (cont.)	B30-R4300

Well and Microplate Labels (B-490, B-499)

- Designed with a short height and long width to fit the necessary information on the plate
- B-490 Polyester: White FreezerBondz label ideal for flat frozen surfaces
- B-499 Nylon Cloth: Thick white nylon cloth with permanent adhesive provides easy handling and conformability
- B-7425 Polypropylene: Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers




Figure 2



B-490: Service temp: -320° F to 366° F

B-499: Service temp: -40° F to 194° F

B-7425: Service temp: -112° F to 158° F

Agency approvals: RoHS

Agency approvals: RoHS

Agency approvals: RoHS

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-151-490	B-490	White	2.000 (50.8)	0.250 (6.4)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-151-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-151-7425	B-499	White	2.000 (50.8)	0.250 (6.4)	1	2000	B30-R4300

Tissue Cassette Labels (B-482)

- White polyester label with superior resistance to tissue processing chemicals and embedding procedures
- Use with the BSP™31 Label Attachment system for tissue cassette identification




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-199-482	B-482	White	1.050 (26.7)	0.250 (6.4)	1	3000	B30-R6400
i3300, BBP33	Fig. 2	B33-213-482	B-482	White	1.050 (26.7)	0.313 (8)	1	3000	B30-R6400

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

General Identification for Laboratory Storage, Equipment and Safety Labels (B-499, B-595, B-7569)

- Super-strong adhesives and colors ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put

B-499: Service temp: -40° F to 193° F Agency approvals:
 B-595: Service temp: -40° F to 180° F Agency approvals:
 B-7569: Service temp: -4° F to 167° F




Figure 1




Figure 2




Figure 3




Figure 70



Fits Printers	Figure	Catalog #	B#	Color /Legend	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth - Permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
Indoor / Outdoor Vinyl (B-595):									
All*	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
Pre-Printed Pre-Cut Blank Sign Headers (B-595):									
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSINO	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSINO	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Pre-Printed GHS / CLP Chemical (B-7569):									
All*	L4B Diamond + Text	B30-260-7569-CLP4B	B-7569		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
		B30-261-7569-CLP4B	B-7569		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
All*	L4C Diamond + Text	B30-18-7569-CLP4C	B-7569		1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

Additional sizes and colors available for: B-595 on page 40; sign headers on page 44; GHS labels on page 42.
 U.S. Patent No. 5,823,689; 6,570,602 on B-595 vinyl. Additional patents pending.

*All supplies listed are compatible with the following printers unless otherwise noted:
 BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30-Series Supply Kits

B30-Series Supply Kits

for BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers

Get started right and save a little, too, with a Brady supply starter kit. These kits contain the most commonly used labels and ribbons to ensure you have what you need to get going on your projects.



Basic Supply Starter Kit

Kit includes:

- (1) B30C-4000-595-YL - 4 in. yellow vinyl
- (1) B30C-4000-595-WT - 4 in. white vinyl
- (1) B30C-2250-595-RD - 2.25 in. red vinyl
- (1) B30-R10000 - Black print ribbon
- (1) B30-R10000-WT - White print ribbon

Catalog #	Description
146069	Basic Supply Starter Kit - Small

Printer sold separately.



Gauge Label Supply Kit for BBP37 Printer*

Kit includes:

- (2) B30C-4000-595-WT - 4 in. white vinyl
- (2) B30-R10000-GR-8 - Green / red paneled print ribbon; 8 in. panel length

Catalog #	Description
146070	Gauge Label Supply Kit - Small

* BBP37 printer required to cut gauge label. Printer sold separately.



Arc Flash Supply Kit

Large kit includes:

- (2) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 ANSI warning header
- (1) B30-241-595-ANSIWA - 2.25 in. x 3 in. B-595 ANSI warning header
- (1) B30EP-174-593-WT - 1 in. x 4 in. B-593 white raised panel label
- (1) B30C-2250-595-OR - 2.25 in. B-595 orange vinyl
- (3) B30-R10000 - Black print ribbon

Small kit includes:

- (2) B30-25-595-ANSIWA - 4 in. x 6 in. ANSI warning header
- (1) B30-R10000 - Black print ribbon

Catalog #	Description
142061	Arc Flash Supply Kit - Large
146071	Arc Flash Supply Kit - Small
S3100W-ARC-KIT	BradyPrinter S3100 w/ Large Arc Flash Supply Kit

Printer sold separately unless otherwise noted.



GHS Supply Kit

Large kit includes:

- (1) B30-262-7569-CLP4B - 4 in. x 6 in. four-diamond GHS label
- (2) B30-261-7569-CLP4B - 3 in. x 4 in. four-diamond GHS label
- (1) B30-260-7569-CLP4B - 2 in. x 3 in. four-diamond GHS label
- (3) B30-R10000 - Black print ribbon

Small kit includes:

- (2) B30-262-7569-CLP4B - 4 in. x 6 in. four-diamond GHS label
- (1) B30-R10000 - Black print ribbon

Catalog #	Description
146072	GHS Supply Kit - Large
146073	GHS Supply Kit - Small
S3100W-GHS-KIT	BradyPrinter S3100 w/ Large GHS Supply Kit

Printer sold separately unless otherwise noted.



Safety and Compliance Supply Kit

Kit includes:

- (1) B30-25-595-ANSIDA - 4 in. x 6 in. B-595 ANSI danger header
- (1) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 ANSI warning header
- (1) B30-25-595-ANSICA - 4 in. x 6 in. B-595 ANSI caution header
- (1) B30-25-595-ANSINO - 4 in. x 6 in. B-595 ANSI notice header
- (1) B30C-4000-526 - 4 in. B-526 photoluminescent
- (1) B30-263-595-NFPA - 4 in. x 6 in. B-595 NFPA right to know diamond
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-RD - Red print ribbon

Catalog #	Description
142062	Safety Supply Kit - Large
S3100W-SAFE-KIT	BradyPrinter S3100 w/ Safety Supply Kit

Printer sold separately unless otherwise noted.



Lean / 5S Visual Workplace Supply Kit

Kit includes:

- (1) B30C-4000-595-WT - 4 in. B-595 white vinyl
- (1) B30C-2250-595-WT - 2.25 in. B-595 white vinyl
- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-2250-581-WT - 2.25 in. B-581 repositionable vinyl
- (1) B30C-1125-581-WT - 1.125 in. B-581 repositionable vinyl
- (1) B30C-2500-509-WT - 2.25 in. magnetic vinyl
- (1) 142133 - Blank valve tag variety pack
- (1) B30-219-595-BLNKWT - Die-cut labels for valve tags
- (1) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 caution header
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-RD - Red print ribbon
- (1) B30-R10000-GN - Green print ribbon
- (1) B30-R10000-BL - Blue print ribbon

Catalog #	Description
142063	Lean / 5S Supply Kit - Large
S3100W-LEAN-KIT	BradyPrinter S3100 w/ Lean / 5S Supply Kit

Printer sold separately unless otherwise noted.



Pipe Identification Supply Kit

Kit includes:

- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-1125-595-YL - 1.125 in. B-595 yellow vinyl
- (1) B30C-4000-595-GN - 4 in. B-595 green vinyl
- (1) B30C-2250-595-GN - 2.25 in. B-595 green vinyl
- (1) B30C-1125-595-GN - 1.125 in. B-595 green vinyl
- (1) B30C-1125-595-BL - 1.125 in. B-595 blue vinyl
- (1) B30C-2250-595-RD - 2.25 in. B-595 red vinyl
- (1) B30C-1125-595-RD - 1.125 in. B-595 red vinyl
- (1) B30EP-174-593-BK - 1 in. x 4 in. B-593 black raised panel
- (1) 142133 - Blank valve tag variety pack
- (1) B30-242-595-BLNKWT - Small die-cut labels for valve tags
- (3) B30-R10000 - Black print ribbon
- (2) B30-R10000-WT - White print ribbon

Catalog #	Description
142064	Pipe ID Supply Kit - Large
S3100W-PIPE-KIT	BradyPrinter S3100 w/ Pipe ID Supply Kit

Printer sold separately unless otherwise noted.



General Industrial Supply Kit

Kit includes:

- (1) B30C-4000-595-WT - 4 in. B-595 white
- (1) B30C-2250-595-WT - 2.25 in. B-595 white
- (1) B30C-1125-595-WT - 1.125 in. B-595 white vinyl
- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-1125-595-YL - 1.125 in. B-595 yellow vinyl
- (1) B30EP-177-593-BK - 2.5 in. x 3 in. B-593 black raised panel
- (1) B30-25-595-ANSIDA - 4 in. x 6 in. B-595 ANSI danger header
- (1) B30-25-595-ANSICA - 4 in. x 6 in. B-595 ANSI caution header
- (1) B30C-2250-584-YL - 2.25 in. Reflective yellow
- (1) B30C-4250-551-WT - 4.25 in. White tag stock
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-WT - White print ribbon
- (1) B30-R10000-RD - Red print ribbon

Catalog #	Description
142065	General Industrial Supply Kit - Large
S3100W-GEN-KIT	BradyPrinter S3100 w/ General Industrial Supply Kit

Printer sold separately unless otherwise noted.

B30-Series Print Ribbons

B30-Series Print Ribbons

for BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers

- Tough, smear-proof ribbons that produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a click – no calibrating, threading, wasted feeding and the ink will always be facing the right direction
- Printer notifies user if installed ribbon is not recommended for installed labels



Drop and click print ribbons for 5-second ribbon supply changes

Single-Color Print Ribbons

- Solid color ribbons for printing a single color onto a label
- Can be used for printing multi-color labels on BBP35 or BBP37 printers if a paneled multi-color ribbon is not on hand
- All ribbons 4.330 in. x 200 ft. (101.9 mm x 60.9 m)

Fits Printers	Catalog #	Color
All*	B30-R10000	Black
All*	B30-R6000	Black
All*	B30-R6200	Black
All*	B30-R6400	Black
All*	B30-R6600	Black
All*	B30-R4300	Black
All*	B30-R10000-WT	White
All*	B30-R4400-WT	White
All*	B30-R6700-WT	White*
All*	B30-R4500-SV	Silver*

Fits Printers	Catalog #	Color
All*	B30-R10000-RD	Red
All*	B30-R10000-GN	Green
All*	B30-R10000-BL	Blue
All*	B30-R10000-YL	Yellow*
All*	B30-R10000-YL2	Yellow*
All*	B30-R10000-OR	Orange
All*	B30-R10000-MA	Magenta
All*	B30-R10000-PRCCY	Process Cyan**
All*	B30-R10000-PRCYEL	Process Yellow**
All*	B30-R10000-PRCMAG	Process Magenta**



* B30-R4500-SV ribbon for use with B-342 black Permasleeves only; B30-R6700-WT ribbon for use with B-345 black Permasleeves only.

** B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colors of B-595.

*** Process ribbons print a much lighter shade. They are designed to be used with other process ribbons and black ribbon to lay down a dot pattern for printing blended colors and process color objects with the BBP35/37.

Multi-Color Paneled Print Ribbons for BBP35 and BBP37

- Ribbons have 2- or 4-color panels for printing multiple colors onto a label
- Print multiple colors without having to swap in multiple ribbons



Two-color print ribbons

Fits Printers	Catalog #	Color	Panel Size Inch (mm)	Length Feet (m)
8 inch panel length. Typical yield: 100 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-8	Black and Red	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-8	Black and Yellow	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-8	Black and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-8	Black and Orange	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-8	Black and Green	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-GR-8	Green and Red	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
16 inch panel length. Typical yield: 60 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-16	Black and Red	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-16	Black and Yellow	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-16	Black and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-16	Black and Orange	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-16	Black and Green	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-RB-16	Red and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)

Four-color print ribbons

Fits Printers	Catalog #	Color	Panel Size Inch (mm)	Length Feet (m)
8 inch panel length. Typical yield: 50 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-8	Black, Red, Green and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRBO-8	Black, Red, Blue and Orange	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-8	Process Cyan, Magenta, Yellow, Black**	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
16 inch panel length. Typical yield: 30 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-16	Black, Red, Green and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-16	Process Cyan, Magenta, Yellow, Black**	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)

** Process ribbons print a much lighter shade. They are designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing blended colors and process color objects with the BBP35 and BBP37 printers.

B30-Series Print Ribbons

Print ribbon and label material compatibility

B-# Material		B30-R4300 (Black)	B30-R6000 (Black)	B30-R6200 (Black)	B30-R6400 (Black)	B30-R6600 (Black)	B30-R10000 (Black)	B30-R4500-SV* (Silver)	B30-R4400-WT (White)	B30-R6700-WT* (White)	B30-R10000-WT (White)	B30-R10000-YL (Yellow)	B30-R10000-YL2 (Yellow)	B30-R10000 (Colors)
B-342	Polyolefin	●	-	-	-	-	-	●*	-	-	-	-	-	-
B-344	Polyolefin	-	-	-	-	●	-	-	●*	-	-	-	-	-
B-345	Polyolefin	-	●	-	-	-	-	-	●	-	-	-	-	-
B-403	Paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-422	Polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-423	Glossy white polyester	-	●	●	-	-	-	-	-	-	-	-	-	-
B-424	Matte white paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-425	Polypropylene	●	-	-	●	-	-	-	-	-	-	-	-	-
B-427	Vinyl	●	-	-	-	-	-	-	-	-	-	-	-	-
B-428	Metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-430	Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-432	Glossy clear polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-434	Glossy metallized polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-437	Polyvinylfluoride	●	-	-	-	-	-	-	-	-	-	-	-	-
B-438	Tamper evident metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-461	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-472	Polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-480	Metallized polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-481	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-482	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-483	Glossy white polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-483	Toughstripe® floor marking tape	-	●	-	-	-	-	-	●	-	-	-	-	-
B-484A	Glossy white polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-486	Matte metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-489	Matte white polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-490	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-492	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-494	Color polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-498	Cloth	-	-	●	-	-	-	-	-	-	-	-	-	-
B-499	Nylon	●	●	-	-	-	-	-	-	-	-	-	-	-
B-509	Printable magnetic	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-526	Photoluminescent polyester	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-549	Cold temperature polyester	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-551	Non-adhesive tag	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-565	Metallized polyester	-	-	-	-	-	●	-	-	-	-	-	-	-
B-569	Low-halide polyester	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-581	Repositionable vinyl	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-584	Retro reflective	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-593	Raised panel polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-595	Outdoor vinyl	-	-	-	-	-	●	-	-	-	●	●**	●**	●*
B-717	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-718	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-719	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-724	Matte amber polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-727	Glossy white polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-854	Toughwash® metal detectable	-	●	-	-	-	-	-	-	-	-	-	-	-
B-855	Toughwash	-	●	-	-	-	-	-	-	-	-	-	-	-
B-7425	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7425-AC	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7569	Vinyl film	-	-	-	-	●	-	-	-	-	-	-	-	-
B-7641	Polyolefin	●	●	-	-	●	-	-	-	-	-	-	-	-
B-7642	Polyolefin	●	-	-	●	-	-	-	-	-	-	-	-	-
B-7643	Polyurethane	-	●	-	-	-	-	-	●	-	-	-	-	-

Benchtop Printers

B30 / B33 Series

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>