

Этикетки для принтера BBR85

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>

Indoor / Outdoor Grade Vinyl Tape (B-595)

- Durable, low-shrink vinyl with our most aggressive adhesive and 8-10 year outdoor durability
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks and wood, textured plastics, cast-iron and paper-jacketed pipes, powder-coated surfaces)

Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8-10 year outdoor vinyl label durability




Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13538	B-595	White	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13549	B-595	White	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13651	B-595	White	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13551	B-595	White	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13562	B-595	White	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13539	B-595	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13550	B-595	Yellow	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13652	B-595	Yellow	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13552	B-595	Yellow	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13563	B-595	Yellow	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13540	B-595	Red	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13601	B-595	Red	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13654	B-595	Red	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13553	B-595	Red	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13610	B-595	Red	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13541	B-595	Blue	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13602	B-595	Blue	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13656	B-595	Blue	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13554	B-595	Blue	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13611	B-595	Blue	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13542	B-595	Green	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13603	B-595	Green	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13655	B-595	Green	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13555	B-595	Green	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13612	B-595	Green	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13543	B-595	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13604	B-595	Orange	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13653	B-595	Orange	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13556	B-595	Orange	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13613	B-595	Orange	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13544	B-595	Black	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13605	B-595	Black	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13557	B-595	Black	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13614	B-595	Black	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13545	B-595	Gold	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13606	B-595	Gold	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13558	B-595	Gold	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13615	B-595	Gold	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13546	B-595	Gray	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13607	B-595	Gray	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13559	B-595	Gray	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13616	B-595	Gray	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13547	B-595	Brown	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13608	B-595	Brown	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13560	B-595	Brown	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13617	B-595	Brown	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13548	B-595	Purple	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13609	B-595	Purple	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13561	B-595	Purple	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13618	B-595	Purple	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	59529	B-595	Clear	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	59530	B-595	Clear	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	59531	B-595	Clear	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	59532	B-595	Clear	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510

U.S. Patent No. 5,318,370; 5,823,689; 6,570,602. Additional patents pending.

Low-Halide Polyester (B-569)

- For labeling stainless steel and smooth surfaces
- Low-halide content for labeling stainless steel surfaces
- Applies best to very smooth surfaces and is ideal for mounting to rigid panels

Service temp: -40° F to 212° F; Application temp: 0° F to 212° F
Average outdoor durability: 3-5 years





Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13565	B-569	White	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13569	B-569	White	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13573	B-569	White	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13577	B-569	White	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13566	B-569	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13570	B-569	Yellow	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13574	B-569	Yellow	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13578	B-569	Yellow	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13567	B-569	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13571	B-569	Orange	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13575	B-569	Orange	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13579	B-569	Orange	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	99167	B-569	Ochre	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	99168	B-569	Ochre	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	99169	B-569	Ochre	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	99170	B-569	Ochre	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13564	B-569	Clear	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13568	B-569	Clear	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13572	B-569	Clear	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13576	B-569	Clear	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510

PowerMark™ Label Maker Materials

The BBP85 printer accepts many of the same materials that the PowerMark. Simply look for "BBP85" or "A" on the supply roll's label to verify compatibility with both models.

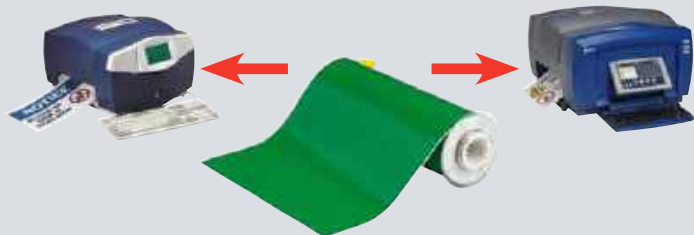

BBP®85 Label Materials

Pre-Printed GHS / CLP Chemical Labels (B-7569)

- For GHS and hazard communication labeling
- Blank labels with pre-printed red diamonds save time during label printing
- 6 diamond layouts that match templates in Brady Workstation App and standalone printer app
- Indoor / outdoor vinyl withstands exposure to moisture, chemicals and handling

Service temp: -4° F to 180° F; Application temp: 50° F to 180° F
Average outdoor durability: 3-5 years



Fits Printers	Catalog #	B#		Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP85	130766	B-7569		L1 diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130772	B-7569		L1 diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130767	B-7569		L2 diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130773	B-7569		L2 diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130768	B-7569		L3A diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130774	B-7569		L3A diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130769	B-7569		L3B diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130775	B-7569		L3B diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130770	B-7569		L4A diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130776	B-7569		L4A diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130771	B-7569		L4B diamond + text	4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130777	B-7569		L4B diamond + text	6.100 (154.9)	8.300 (210.8)	1	70	13510

Pre-Printed Pre-Cut Blank Sign Headers (B-595, B-7569)

- For creating arc flash and safety warning labels in seconds
- Create custom, colorful safety labels using only a black ribbon
- Meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured, and difficult to adhere to surfaces

B-595 vinyl: Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8-10 years outdoor vinyl durability

B-7569 vinyl: Service temp: -4° F to 167° F; Application temp: 50° F to 167° F
Average outdoor durability: Up to 3 years vinyl durability




Figure 70




Figure 82



Fits Printers	Figure	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP85	Fig. 70	140886	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130750	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130749	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140887	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130753	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130752	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140888	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130756	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130755	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140889	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130759	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130758	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140885	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130762	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130761	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140890	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130765	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130764	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 82	140883	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 82	132393	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 82	140884	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 82	132395	B-595		7.000 (177.8)	10.000 (254.0)	60	13510

Creating On-Demand Rigid Signs

Rigid Sign Blanks

Create your own rigid signs using printed output from your Brady printer and rigid sign panels.

Three mounding techniques to choose from:

- Mount label to a rigid sign panel using the label's pressure sensitive adhesive
- Use the BLS1255 Laminating System to laminate output to a rigid sign panel
- Mount label behind a clear acrylic sign panel using the panel's included pressure sensitive adhesive



Aluminum panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146083	Alum.	Wht	2.500	6.260	10
146113	Alum.	Wht	2.500	10.250	10
13629	Alum.	Wht	4.250	6.250	10
106461	Alum.	Wht	4.250	10.250	10
146082	Alum.	Wht	4.250	14.250	10
13632	Alum.	Wht	7.250	10.250	10
106460	Alum.	Wht	7.630	10.380	10
106462	Alum.	Wht	10.250	10.250	10
13635	Alum.	Wht	10.250	14.250	10
146116	Alum.	Ylw	2.500	6.260	10
146117	Alum.	Ylw	2.500	10.250	10
13630	Alum.	Ylw	4.250	6.250	10
146114	Alum.	Ylw	4.250	10.250	10
146115	Alum.	Ylw	4.250	14.250	10
13633	Alum.	Ylw	7.625	10.375	10
13636	Alum.	Ylw	10.250	14.250	10
13631	Alum.	Org	4.250	6.250	10
13634	Alum.	Org	7.625	10.375	10
15Y885	Alum.	Org	10.250	14.250	10

Plastic panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146076	Plastic	Wht	2.500	6.250	10
146077	Plastic	Wht	2.500	10.250	10
13620	Plastic	Wht	4.250	6.250	10
146074	Plastic	Wht	4.250	10.250	10
146075	Plastic	Wht	4.250	14.250	10
13623	Plastic	Wht	7.630	10.380	10
146080	Plastic	Ylw	2.500	6.250	10
146081	Plastic	Ylw	2.500	10.250	10
13621	Plastic	Ylw	4.250	6.250	10
146078	Plastic	Ylw	4.250	10.250	10
146079	Plastic	Ylw	4.250	14.250	10
13622	Plastic	Org	4.250	6.250	10
13625	Plastic	Org	7.630	10.380	10
13628	Plastic	Org	10.250	14.250	10

Clear acrylic panels

Includes pressure sensitive adhesive backing to mount output behind the clear panel — protecting the graphics

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
13638	Acrylic	Clear	4.000	6.000	10
106464	Acrylic	Clear	4.250	10.250	10
13639	Acrylic	Clear	7.250	10.000	10
106463	Acrylic	Clear	7.250	10.250	10
13640	Acrylic	Clear	10.000	14.000	10
106465	Acrylic	Clear	10.25 in.	10.25 in.	10

BLS1255 Laminating System

BLS1255 laminator enables you to quickly and easily make custom rigid signs for your facility

- Mount signs to rigid panels to create signs for your facility
- Fast and easy to use
- No heat or electricity needed
- Laminate documents up to 12 in. wide



Catalog #	Description
105038	BLS1255 Laminating System
105041	12 in. x 50 ft. Double-Sided Polyester Overlamine



Laminates documents up to 12 in. wide

Pre-Printed Right-To-Know Chemical Labels (B-595)

- For quickly creating NFPA and color bar labels
- Blank die-cut labels pre-printed with chemical diamonds and color bars
- Indoor / outdoor grade material withstands exposure to moisture, chemicals and handling
- Allows printer to produce 5-color chemical labels in a single print pass

Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8 to 10 years outdoor vinyl label durability



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP85	130808	B-595	 Diamond + text	4.000 (101.6)	6.000 (152.4)	1	95	13511
BBP85	130809	B-595	 Diamond + text	7.000 (177.8)	10.000 (254.0)	1	60	13510
BBP85	130810	B-595	 Diamond only	6.000 (152.4)	6.000 (152.4)	1	95	13511
BBP85	130811	B-595	 Color bar + text	4.000 (101.6)	6.000 (152.4)	1	95	13511
BBP85	130812	B-595	 Color bar + text	7.000 (177.8)	10.000 (254.0)	1	60	13510

Retro Reflective Tape (B-584)

- For highly reflective identification that shines back brightly when struck by light
- Ideal for labeling outdoor metal utility poles, pedestals, jobsite equipment and roof-top equipment especially in low light

Service temp: -40° F to 158° F; Average outdoor durability: 4 to 6 years
Application temp: 0° F to 158° F (yellow and orange), 50° F to 158° F (silver)



Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13580	B-584	Silver	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13585	B-584	Silver	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13590	B-584	Silver	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	51584	B-584	Yellow	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	51585	B-584	Yellow	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	51586	B-584	Yellow	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13404	B-584	Orange	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13403	B-584	Orange	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13402	B-584	Orange	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- Identification that glows in the dark for up to 10 hours
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls, and vital equipment controls

Service temp: -40° F to 140° F; Application temp: 40° F to 140° F



Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	105912	B-526	Luminous Green	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511 or 13595
BBP85, PMK	Fig. 33	105913	B-526	Luminous Green	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510 or 13514
BBP85, PMK	Fig. 33	105914	B-526	Luminous Green	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510 or 13514

BBP85 Printer Ribbons


Choose from a variety of heavy-duty, smear-proof ribbons, including single color and multi-color paneled ribbons. These ribbons are uniquely designed with memory cells that communicate information to the BBP85 printer.

Single color print ribbons

Fits Printers	Catalog #	Color	Size Inch (mm)	Length Foot (m)
BBP85, PMK	13511	Black	6.250 (158.0)	200 (60.9)
BBP85, PMK	13510	Black	8.800 (224.0)	200 (60.9)
BBP85, PMK	13513	White	6.250 (158.0)	200 (60.9)
BBP85, PMK	13512	White	8.800 (224.0)	200 (60.9)
BBP85, PMK	13595	Red	6.250 (158.0)	200 (60.9)
BBP85, PMK	13514	Red	8.800 (224.0)	200 (60.9)
BBP85, PMK	13596	Blue	6.250 (158.0)	200 (60.9)
BBP85, PMK	13515	Blue	8.800 (224.0)	200 (60.9)
BBP85, PMK	13597	Green	6.250 (158.0)	200 (60.9)
BBP85, PMK	13516	Green	8.800 (224.0)	200 (60.9)
BBP85, PMK	13598	Magenta	6.250 (158.0)	200 (60.9)
BBP85, PMK	13517	Magenta	8.800 (224.0)	200 (60.9)
BBP85, PMK	13599	Yellow	6.250 (158.0)	200 (60.9)
BBP85, PMK	13518	Yellow	8.800 (224.0)	200 (60.9)
BBP85, PMK	13600	Orange	6.250 (158.0)	200 (60.9)
BBP85, PMK	13519	Orange	8.800 (224.0)	200 (60.9)



Single color print ribbon



Two-color panel print ribbon



Four-color panel print ribbon

Two-color panel print ribbons

Fits Printers	Catalog #	Color	Ribbon Width Inch (mm)	Color Panel Length Inch (mm)	Overall Length Feet (m)	Typical Yield From Ribbon
8 in. panels used to create two color signs up to 8 in. long						
BBP85, PMK	13523	Black and Red	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13522	Black and Red	8.800 (223.5)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13527	Black and Yellow	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13529	Black and Orange	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13704	Black and Green	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13706	Black and Green	8.800 (223.5)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
15 in. panels used to create two color signs up to 14 in. long						
BBP85, PMK	13521	Black and Red	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13520	Black and Red	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13525	Black and Blue	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13524	Black and Blue	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13526	Black and Yellow	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13528	Black and Orange	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13705	Black and Green	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13707	Black and Green	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)

Four-color panel print ribbons

Fits Printers	Catalog #	Color	Ribbon Width Inch (mm)	Color Panel Length Inch (mm)	Overall Length Feet (m)	Typical Yield From Ribbon
8 in. panels used to create four color signs up to 8 in. long						
BBP85, PMK	13533	Black / Red / Blue / Yellow	6.250 (158.0)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13532	Black / Red / Blue / Yellow	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13537	Black / Red / Blue / Green	6.250 (158.0)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13536	Black / Red / Blue / Green	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	51448	Black / Red / Orange / Blue	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
15 in. panels used to create four color signs up to 14 in. long						
BBP85, PMK	13531	Black / Red / Blue / Yellow	6.250 (158.0)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13530	Black / Red / Blue / Yellow	8.800 (223.5)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13535	Black / Red / Blue / Green	6.250 (158.0)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13534	Black / Red / Blue / Green	8.800 (223.5)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>