

Этикетки для принтера М611, ВМР61

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>

Wire and Cable Materials

Self-Laminating Vinyl Wire and Cable Labels (B-427)

Labels feature a clear, non-printable area that wraps around print-on area to protect text. Vinyl material offers superior resistance to abrasion, solvents, oil, grease, dirt and water. Temp. range -40° F to 158° F (-40° C to 70° C), UL recognized.




Figure 2




Figure 27




Figure 32




Figure 42b




Figure 43



Fits Printers	Figure	Catalog #	B#	Material	Color	Approx. Wire Gauge	Label Width A Inch (mm)	Label Height B Inch (mm)	Printable Area C Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 2	PTL-105-427-AW	B-427	Vinyl	White	All White	1.100 (27.9)	0.250 (6.4)	1.100 (27.9)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 27	PTL-74-427	B-427	Vinyl	White	Cables	2.200 (55.88)	0.500 (12.7)	0.500 (12.7)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-10-427	B-427	Vinyl	White	16 to 10	0.250 (6.35)	0.750 (19.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-11-427	B-427	Vinyl	White	16 to 10	0.500 (12.7)	0.750 (19.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-96-427	B-427	Vinyl	White	16 to 10	1.000 (25.4)	0.750 (19.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-427-AW	B-427	Vinyl	White	All White	1.500 (38.1)	0.750 (19.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-17-427	B-427	Vinyl	White	12 to 10	0.500 (12.7)	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-18-427	B-427	Vinyl	White	10 to 4	0.750 (19.05)	1.000 (25.4)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427	B-427	Vinyl	White	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-104-427	B-427	Vinyl	White	12 to 10	1.500 (38.1)	1.000 (25.4)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-87-427	B-427	Vinyl	White	12 to 10	1.750 (44.45)	1.000 (25.4)	1.750 (44.5)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-78-427-AW	B-427	Vinyl	White	All White	1.900 (48.26)	1.000 (25.4)	1.900 (48.2)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-102-427	B-427	Vinyl	White	10 to 4	0.500 (12.7)	1.250 (31.8)	0.500 (12.7)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-103-427	B-427	Vinyl	White	10 to 4	1.000 (25.4)	1.250 (31.8)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427	B-427	Vinyl	White	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427	B-427	Vinyl	White	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427	B-427	Vinyl	White	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427	B-427	Vinyl	White	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427	B-427	Vinyl	White	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-88-427	B-427	Vinyl	White	10 to 4	1.750 (44.45)	1.500 (38.1)	1.750 (44.5)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-107-427	B-427	Vinyl	White	10 to 4	2.000 (50.8)	1.500 (38.1)	2.000 (50.8)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427	B-427	Vinyl	White	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-157-427	B-427	Vinyl	White	Cables	1.500 (38.1)	2.500 (63.5)	1.500 (38.1)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-75-427	B-427	Vinyl	White	Cables	1.000 (25.4)	2.625 (66.68)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-66-427	B-427	Vinyl	White	Cables	1.938 (49.23)	3.150 (80)	1.938 (49.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 43	PTL-64-427	B-427	Vinyl	White	Cables	1.000 (25.4)	3.375 (85.7)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427	B-427	Vinyl	White	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427	B-427	Vinyl	White	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-109-427	B-427	Vinyl	White	Cables	1.500 (38.1)	4.000 (101.6)	1.500 (38.1)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427	B-427	Vinyl	White	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 42b	PTL-106-427	B-427	Vinyl	White	-	1.500 (38.1)	50 ft. (15.24 m)	-	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-10-427-YL	B-427	Vinyl	Yellow	16 to 10	0.250 (6.35)	0.750 (19.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-11-427-YL	B-427	Vinyl	Yellow	16 to 10	0.500 (12.7)	0.750 (19.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-17-427-YL	B-427	Vinyl	Yellow	12 to 10	0.500 (12.7)	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-18-427-YL	B-427	Vinyl	Yellow	10 to 4	0.750 (19.05)	1.000 (25.4)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-YL	B-427	Vinyl	Yellow	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-YL	B-427	Vinyl	Yellow	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-YL	B-427	Vinyl	Yellow	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-YL	B-427	Vinyl	Yellow	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-YL	B-427	Vinyl	Yellow	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-YL	B-427	Vinyl	Yellow	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-YL	B-427	Vinyl	Yellow	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-YL	B-427	Vinyl	Yellow	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-YL	B-427	Vinyl	Yellow	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-YL	B-427	Vinyl	Yellow	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310

Self-Laminating Labels continue on next page.

Wire and Cable Materials

Self-Laminating Vinyl Wire and Cable Labels (continued)




Figure 32

Fits Printers	Figure	Catalog #	B#	Material	Color	Approx. Wire Gauge	Label Width A Inch (mm)	Label Height B Inch (mm)	Printable Area C Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-RD	B-427	Vinyl	Red	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-RD	B-427	Vinyl	Red	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-RD	B-427	Vinyl	Red	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-RD	B-427	Vinyl	Red	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-RD	B-427	Vinyl	Red	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-RD	B-427	Vinyl	Red	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-RD	B-427	Vinyl	Red	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-RD	B-427	Vinyl	Red	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-RD	B-427	Vinyl	Red	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-RD	B-427	Vinyl	Red	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-GR	B-427	Vinyl	Green	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-GR	B-427	Vinyl	Green	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-GR	B-427	Vinyl	Green	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-GR	B-427	Vinyl	Green	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-GR	B-427	Vinyl	Green	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-GR	B-427	Vinyl	Green	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-GR	B-427	Vinyl	Green	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-GR	B-427	Vinyl	Green	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-GR	B-427	Vinyl	Green	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-GR	B-427	Vinyl	Green	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-OR	B-427	Vinyl	Orange	10 to 4	1.500 (38.1)	0.750 (19.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-OR	B-427	Vinyl	Orange	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-OR	B-427	Vinyl	Orange	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-OR	B-427	Vinyl	Orange	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-OR	B-427	Vinyl	Orange	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-OR	B-427	Vinyl	Orange	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-OR	B-427	Vinyl	Orange	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-OR	B-427	Vinyl	Orange	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-OR	B-427	Vinyl	Orange	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-OR	B-427	Vinyl	Orange	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310

Self-Laminating Labels continue on next page.

Self-Laminating Label Heights

If you know your wire diameter or wire circumference, you can easily determine the correct label height by using the formula below:

Step 1:
$$\frac{\text{wire dia.} \times 3.147 (\pi)}{\text{wire circumference}}$$

Step 2:
$$\frac{\text{wire circumference} \times 1.5}{\text{total label height needed}}$$

(Multiplying by 1.5 allows the label to wrap around the wire 1.5 times)



Wire and Cable Materials

Self-Laminating Vinyl Wire and Cable Labels (continued)




Figure 32

Fits Printers	Figure	Catalog #	B#	Material	Color	Approx. Wire Gauge	Label Width A Inch (mm)	Label Height B Inch (mm)	Printable Area C Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-BL	B-427	Vinyl	Blue	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-BL	B-427	Vinyl	Blue	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-BL	B-427	Vinyl	Blue	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-BL	B-427	Vinyl	Blue	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-BL	B-427	Vinyl	Blue	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-BL	B-427	Vinyl	Blue	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-BL	B-427	Vinyl	Blue	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-BL	B-427	Vinyl	Blue	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-BL	B-427	Vinyl	Blue	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-BL	B-427	Vinyl	Blue	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-PL	B-427	Vinyl	Purple	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-PL	B-427	Vinyl	Purple	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-PL	B-427	Vinyl	Purple	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-PL	B-427	Vinyl	Purple	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-PL	B-427	Vinyl	Purple	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-PL	B-427	Vinyl	Purple	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-PL	B-427	Vinyl	Purple	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-PL	B-427	Vinyl	Purple	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-PL	B-427	Vinyl	Purple	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-PL	B-427	Vinyl	Purple	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-BR	B-427	Vinyl	Brown	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-BR	B-427	Vinyl	Brown	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-BR	B-427	Vinyl	Brown	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-BR	B-427	Vinyl	Brown	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-BR	B-427	Vinyl	Brown	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-BR	B-427	Vinyl	Brown	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-BR	B-427	Vinyl	Brown	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-BR	B-427	Vinyl	Brown	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-BR	B-427	Vinyl	Brown	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-BR	B-427	Vinyl	Brown	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-427-GY	B-427	Vinyl	Gray	12 to 10	1.000 (25.4)	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-28-427-GY	B-427	Vinyl	Gray	10 to 4	0.250 (6.35)	1.500 (38.1)	0.250 (6.35)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-29-427-GY	B-427	Vinyl	Gray	10 to 4	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-30-427-GY	B-427	Vinyl	Gray	10 to 4	0.750 (19.05)	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-427-GY	B-427	Vinyl	Gray	10 to 4	1.000 (25.4)	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-32-427-GY	B-427	Vinyl	Gray	10 to 4	1.500 (38.1)	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-427-GY	B-427	Vinyl	Gray	Cables	1.000 (25.4)	2.500 (63.5)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-23-427-GY	B-427	Vinyl	Gray	Cables	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-33-427-GY	B-427	Vinyl	Gray	Cables	1.500 (38.1)	4.000 (101.6)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-34-427-GY	B-427	Vinyl	Gray	Cables	1.500 (38.1)	6.000 (152.4)	1.500 (38.1)	50	M61-R4310

Self-Extinguishing Polyvinylfluoride Labels (B-642)

Clear Polyvinylfluoride film with a white printable zone and a translucent overlaminating area offers excellent flexibility for wrapping around small diameter wires. Material features self-extinguishing properties and is solvent resistant.




Figure 32



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Printer Area C Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 32	PTL-19-642	B-642	Polyvinylfluoride	White	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-31-642	B-642	Polyvinylfluoride	White	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 32	PTL-21-642	B-642	Polyvinylfluoride	White	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	100	M61-R4310

Wire and Cable Materials

Vinyl and Nylon Cloth Wire and Cable Labels (B-498 and B-499)

- **B-498 Repositionable Vinyl Cloth:** Adhesive and cloth backing offers excellent holding power, yet allow for clean removal and repositioning if necessary. Temp. range: -40° F to 175° F (-40° C to 70° C). UL recognized
- **B-499 Nylon Cloth Material:** Permanent adhesive. Pliable for rough or smooth surfaces. Temp. range: -94° F to 194° F (-70° C to 90° C). UL recognized




Figure 2



Fits Printers	Figure	Catalog #	B#	Material	Color	Approx. Wire Gauge	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-498 Repositionable Vinyl Cloth										
M611, BMP61, 71*, TLS	Fig. 2	PTL-7-498	B-498	Vinyl	White	22 to 16	0.500 (12.7)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-15-498	B-498	Vinyl	White	22 to 16	1.000 (25.4)	0.275 (7)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-498	B-498	Vinyl	White	16 to 10	0.250 (6.35)	0.750 (19.1)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-11-498	B-498	Vinyl	White	16 to 10	0.500 (12.7)	0.750 (19.1)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-498	B-498	Vinyl	White	12 to 10	0.375 (9.53)	1.000 (25.4)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-498	B-498	Vinyl	White	12 to 10	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-498	B-498	Vinyl	White	12 to 10	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-18-498	B-498	Vinyl	White	10 to 4	0.750 (19.05)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-498	B-498	Vinyl	White	10 to 4	0.750 (19.05)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-498	B-498	Vinyl	White	10 to 4	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-498	B-498	Vinyl	White	10 to 4	1.500 (38.1)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-498	B-498	Vinyl	White	10 to 4	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-498	B-498	Vinyl	White	10 to 4	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-21-498	B-498	Vinyl	White	-	1.000 (25.4)	2.500 (63.5)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-23-498	B-498	Vinyl	White	-	1.000 (25.4)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-33-498	B-498	Vinyl	White	-	1.500 (38.1)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-34-498	B-498	Vinyl	White	-	1.500 (38.1)	6.000 (152.4)	50	M61-R4310
B-499 Nylon Cloth										
M611, BMP61, 71*, TLS	Fig. 2	PTL-7-499	B-499	Vinyl	White	22 to 16	0.500 (12.7)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-11-499	B-499	Vinyl	White	16 to 10	0.500 (12.7)	0.750 (19.1)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-499	B-499	Vinyl	White	12 to 10	0.375 (9.53)	1.000 (25.4)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-499	B-499	Vinyl	White	12 to 10	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-499	B-499	Vinyl	White	10 to 4	0.500 (12.7)	1.500 (38.1)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-18-499	B-499	Vinyl	White	10 to 4	0.750 (19.05)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-499	B-499	Vinyl	White	10 to 4	0.750 (19.05)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-499	B-499	Vinyl	White	10 to 4	1.000 (25.4)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-499	B-499	Vinyl	White	10 to 4	1.500 (38.1)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-117-499	B-499	Vinyl	White	-	0.900 (22.86)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-84-499	B-499	Vinyl	White	-	0.900 (22.86)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-98-499	B-499	Vinyl	White	-	1.000 (25.4)	0.375 (9.5)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-21-499	B-499	Vinyl	White	-	1.000 (25.4)	2.500 (63.5)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-23-499	B-499	Vinyl	White	-	1.000 (25.4)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-81-499	B-499	Vinyl	White	-	1.900 (48.26)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-78-499	B-499	Vinyl	White	-	1.900 (48.26)	1.000 (25.4)	250	M61-R4310

High-Temperature Wire and Cable Labels (B-437)

Polyvinylfluoride material for applications where high temperature and self-extinguishing features are required. Heavy-duty performance with excellent resistance to water, oil and other fluids. Meets MIL-M-87958 Standard. Temp. range: -94° F to 275° F (-70° C to 135° C). ROHS compliant.




Figure 2




Figure 33




Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 2	PTL-9-437	B-437	Polyvinylfluoride	White	0.650 (16.51)	0.200 (5.1)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-437	B-437	Polyvinylfluoride	White	0.750 (19.05)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-15-437	B-437	Polyvinylfluoride	White	1.000 (25.4)	0.275 (7)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-437	B-437	Polyvinylfluoride	White	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-41-437-WT	B-437	Polyvinylfluoride	White	1.500 (38.1)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-41-437-YL	B-437	Polyvinylfluoride	Yellow	1.500 (38.1)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310

Wire and Cable Materials

Polypropylene Flags (B-425 and B-8425)


- **B-425 Polypropylene Solvent-Resistant Material:** Matte white polypropylene with excellent solvent resistance and print performance; not recommended for long-term outdoor use
- **B-8425 Polypropylene Solvent-Resistant Material:** Glossy white polypropylene with excellent solvent resistance and print performance; not recommended for long-term outdoor use

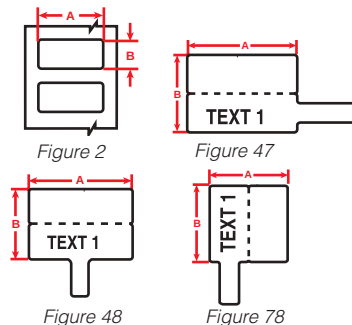

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-425 Permanent Polypropylene									
M611, BMP61, 71*, TLS	Fig. 48	PTLFT-01-425	B-425	Polypropylene	White	1.180 (29.97)	0.788 (20)	250	M61-R6210
M611, BMP61, 71*, TLS	Fig. 47	PTLFP-01-425	B-425	Polypropylene	White	1.180 (29.97)	0.788 (20)	250	M61-R6210
M611, BMP61, 71*, TLS	Fig. 78	PTLFT-54-425	B-425	Polypropylene	White	1.490 (37.85)	1.575 (40)	100	M61-R6210
M611, BMP61, 71*, TLS	Fig. 78	PTLFP-02-425	B-425	Polypropylene	White	1.750 (44.45)	1.000 (25.4)	100	M61-R6210
B-8425 Permanent Polypropylene									
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-8425	B-8425	Polypropylene	White	0.750 (19.05)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 47	PTLFP-01-8425	B-8425	Polypropylene	White	1.180 (29.97)	0.788 (20)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 48	PTLFT-01-8425	B-8425	Polypropylene	White	1.180 (29.97)	0.788 (20)	250	M61-R6010

Non-Adhesive Polypropylene Tags (B-109 and B-412)


- **B-109 Non-Adhesive Polyethylene Tags:** Multi-purpose tags for identifying multi-conductor cables. Good weatherability and legibility after solvent exposure
- **B-412 Non-Adhesive Polypropylene Tags:** Thick polypropylene material for hardware identification. High print legibility and high tensile strength

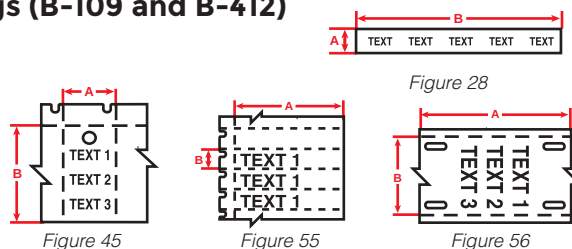

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-109 Non-Adhesive Polyethylene Tag									
M611, BMP61, 71*, TLS	Fig. 56	PTL-12-109	B-109	Polyethylene	White	0.750 (19.05)	3.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 45	PTL-36-109	B-109	Polyethylene	White	1.750 (44.45)	1.125 (28.6)	250	M61-R4310
B-412 Non-Adhesive Polypropylene Tag									
M611, BMP61, 71*, TLS	Fig. 28	PTL-55-412	B-412	Polypropylene	White	0.230 (5.84)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 28	PTL-56-412	B-412	Polypropylene	White	0.375 (9.53)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 28	PTL-57-412	B-412	Polypropylene	White	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 28	PTL-58-412	B-412	Polypropylene	White	0.535 (13.59)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 28	PTL-59-412	B-412	Polypropylene	White	0.785 (19.94)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 55	PTL-40-412	B-412	Polypropylene	White	1.938 (49.23)	0.375 (9.5)	750	M61-R4310

Polyethylene Tags (B-145 and B-145FR)

Non-adhesive tag material for identifying multi-conductor cable, equipment, safety warning repair and work-in-progress. B-145FR features fire-retardant properties.

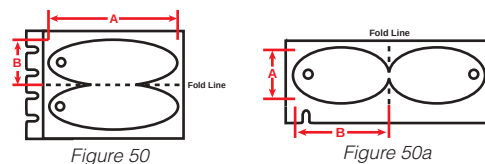

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-145 Polyethylene Tag Material									
M611, BMP61	Fig. 50a	M61-144-145-GY	B-145	Polyethylene	Gray	0.758 (19.3)	1.206 (30.63)	100	M61-R6010
M611, BMP61	Fig. 50a	BM61-144-145-GY	B-145	Polyethylene	Gray	0.758 (19.3)	1.206 (30.63)	900	M61-R6010
M611, BMP61	Fig. 50a	M61-145-145-GY	B-145	Polyethylene	Gray	1.000 (25.4)	1.750 (44.45)	100	M61-R6010
M611, BMP61	Fig. 50a	BM61-145-145-GY	B-145	Polyethylene	Gray	1.000 (25.4)	1.750 (44.45)	650	M61-R6010
B-145FR Flame-Retardant Polyethylene Tag Material									
M611, BMP61	Fig. 50a	M61-144-145FR-GY	B-145FR	Polyethylene	Gray	0.758 (19.3)	1.206 (30.63)	100	M61-R6010
M611, BMP61	Fig. 50a	BM61-144-145FR-GY	B-145FR	Polyethylene	Gray	0.758 (19.3)	1.206 (30.63)	900	M61-R6010
M611, BMP61	Fig. 50a	M61-145-145FR-GY	B-145FR	Polyethylene	Gray	1.000 (25.4)	1.750 (44.45)	100	M61-R6010
M611, BMP61	Fig. 50a	BM61-145-145FR-GY	B-145FR	Polyethylene	Gray	1.000 (25.4)	1.750 (44.45)	650	M61-R6010
The following tags are only compatible with the BMP71 and TLS 2200 printers									
BMP71*, TLS ONLY	Fig. 50	PTL-111-145-GY	B-145	Polyethylene	Gray	1.206 (30.63)	0.758 (19.3)	100	R6210 (TLS ribbon)
BMP71*, TLS ONLY	Fig. 50	PTL-110-145-GY	B-145	Polyethylene	Gray	1.750 (44.45)	1.000 (25.4)	100	R6210 (TLS ribbon)
BMP71*, TLS ONLY	Fig. 50	PTL-111-145FR-GY	B-145FR	Polyethylene	Gray	1.206 (30.63)	0.758 (19.3)	100	R6210 (TLS ribbon)
BMP71*, TLS ONLY	Fig. 50	PTL-110-145FR-GY	B-145FR	Polyethylene	Gray	1.750 (44.45)	1.000 (25.4)	100	R6210 (TLS ribbon)

Wire and Cable Materials

Durasleeve® Wire Marking Inserts (B-390)

Matte white polypropylene material is designed to be printed and affixed to a wire using extruded, clear PVC wire-marking carriers (sold separately).




Figure 38



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 38	BPTDS-15-390	B-390	Polypropylene	White	0.590 (15)	0.163 (4.14)	3000	M61-R6010
M611, BMP61, 71*, TLS	Fig. 38	PTDS-15-390	B-390	Polypropylene	White	0.590 (15)	0.163 (4.14)	300	M61-R6010
M611, BMP61, 71*, TLS	Fig. 38	BPTDS-30-390	B-390	Polypropylene	White	1.181 (30)	0.163 (4.14)	3000	M61-R6010
M611, BMP61, 71*, TLS	Fig. 38	PTDS-30-390	B-390	Polypropylene	White	1.181 (30)	0.163 (4.14)	300	M61-R6010

0.590 in. wide clear carriers

Catalog #	Carrier Width Inch (mm)	Wire Outside Diameter Inch (mm)	Wire Gauge	Qty/ Pkg
DMC-1.3/3-15	0.590 (14.98)	0.051 (1.30) to 0.118 (3.00)	20 to 12	2000
DMC-2.5/5-15	0.590 (14.98)	0.098 (2.50) to 0.197 (5.00)	16 to 10	3000
DMC-4/10-15	0.590 (14.98)	0.157 (4.00) to 0.393 (10.00)	10 to 4	4000
DMC-8/16-15	0.590 (14.98)	0.315 (8.00) to 0.630 (16.00)	6 to 250	7500

1.180 in. wide clear carriers

Catalog #	Carrier Width Inch (mm)	Wire Outside Diameter Inch (mm)	Wire Gauge	Qty/ Pkg
DMC-1.3/3-30	1.180 (29.97)	0.051 (1.30) to 0.118 (3.00)	20 to 12	500
DMC-2.5/5-30	1.180 (29.97)	0.098 (2.50) to 0.197 (5.00)	16 to 10	100
DMC-4/10-30	1.180 (29.97)	0.157 (4.00) to 0.393 (10.00)	10 to 4	200
DMC-8/16-30	1.180 (29.97)	0.315 (8.00) to 0.630 (16.00)	6 to 250	250

BradySleeve™ Wire Markers (B-321)

Heat-shrinkable polyolefin sleeve with excellent resistance to oil and solvents.




Figure 36



Fits Printers	Figure	Catalog #	B#	Material	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Sleeve Width A Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, TLS	Fig. 36	PTS-0.45-350-321	B-321	Polyolefin	White	16 to 10	0.075 (1.91)	0.160 (4.06)	0.450 (11.43)	0.350 (8.9)	500	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-0.95-350-321	B-321	Polyolefin	White	16 to 10	0.075 (1.91)	0.160 (4.06)	0.950 (24.13)	0.350 (8.9)	500	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-1.90-350-321	B-321	Polyolefin	White	16 to 10	0.075 (1.91)	0.160 (4.06)	1.900 (48.26)	0.350 (8.9)	500	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-0.45-500-321	B-321	Polyolefin	White	10 to 8	0.160 (4.06)	0.235 (5.97)	0.450 (11.43)	0.500 (12.7)	500	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-0.95-500-321	B-321	Polyolefin	White	10 to 8	0.160 (4.06)	0.235 (5.97)	0.950 (24.13)	0.500 (12.7)	500	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-1.90-500-321	B-321	Polyolefin	White	10 to 8	0.160 (4.06)	0.235 (5.97)	1.900 (48.26)	0.500 (12.7)	250	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-0.95-750-321	B-321	Polyolefin	White	4 to 2	0.335 (8.51)	0.390 (9.91)	0.950 (24.13)	0.750 (19.1)	250	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-1.90-750-321	B-321	Polyolefin	White	4 to 2	0.335 (8.51)	0.390 (9.91)	1.900 (48.26)	0.750 (19.1)	250	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-0.95-1000-321	B-321	Polyolefin	White	1 to 0	0.375 (9.53)	0.540 (13.72)	0.950 (24.13)	1.000 (25.4)	250	M61-R6210
M611, BMP61, TLS	Fig. 36	PTS-1.90-1000-321	B-321	Polyolefin	White	1 to 0	0.375 (9.5)	0.540 (13.72)	1.900 (48.26)	1.000 (25.4)	250	M61-R6210

PermaSleeve® FR Fluid-Resistant Wire Markers (B-344)

3:1 heat-shrinkable wire marking sleeves fit snugly around wires for identification and protection and offer greater resistance to harsh chemicals such as fuels, lubricants and cleaning solvents. Temp. range: -67° F to 275° F (-55° C to 135° C).

Meets specifications:

- SAE-AMS-DTL23053/6 (Class 1)
- SAE-AS-81531
- MIL-STD-202G, method 215K

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202G




Figure 44



Fits Printers	Figure	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Recovered Diameter Inch (mm)	Sleeve Width A Inch (mm)	Qty. Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-187-175-WT	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-250-1-WT	White	20 to 10	0.083 (2.1)	0.215 (5.5)	0.250 (6.4)	0.083 (2.1)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-500-1-WT	White	8 to 1	0.166 (4.2)	0.450 (11.4)	0.500 (12.7)	0.166 (4.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-250-1-YL	Yellow	20 to 10	0.083 (2.1)	0.215 (5.5)	0.250 (6.4)	0.083 (2.1)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-250-175-YL	Yellow	20 to 10	0.083 (2.1)	0.215 (5.5)	0.250 (6.4)	0.083 (2.1)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSFR-750-175-BK	Black	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	M61-R6710-WT

** ⚠️ **WARNING:** Cancer www.P65Warnings.ca.gov

Wire and Cable Materials

PermaSleeve® PS Polyolefin Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant. Temp range: -67° F to 275° F (-55° C to 130° C). RoHS compliant and UL recognized.

Meets specifications:

- SSAE-AS-23053/5
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202

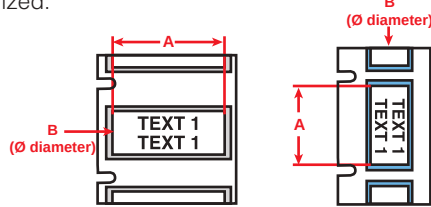


Figure 44

Figure 77



Fits Printers	Figure	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Recovered Diameter Inch (mm)	Sleeve Width A Inch (mm)	Qty. Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-WT	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-WT	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-094-2-WT-R	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-WT	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-WT	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-125-2-WT-R	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-WT	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-WT	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-187-2-WT-R	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-WT	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-WT	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-250-2-WT-R	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-WT	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-WT	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-375-2-WT-R	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-1-WT	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-WT	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-500-2-WT-R	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-1-WT	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-175-WT	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-750-2-WT-R	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-1-WT	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-WT	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-1000-2-WT-R	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-YL	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-YL	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-094-2-YL-R	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-YL	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-YL	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-125-2-YL-R	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-YL	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-YL	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-187-2-YL-R	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-YL	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-YL	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-250-2-YL-R	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-YL	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-YL	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-375-2-YL-R	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-1-YL	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-YL	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-500-2-YL-R	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-1-YL	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-175-YL	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-750-2-YL-R	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-1-YL	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-YL	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-1000-2-YL-R	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	M61-R6610

Wire and Cable Materials

PSPT PermaSleeves (continued)

Fits Printers	Figure	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Recovered Diameter Inch (mm)	Sleeve Width A Inch (mm)	Qty. Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-094-2-BK-R	Black	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-BK	Black	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-125-2-BK-R	Black	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-BK	Black	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-BK	Black	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-2-BK-R	Black	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-BK	Black	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-2-BK-R	Black	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-2-BK-R	Black	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-BK	Black	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-500-2-BK-R	Black	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-750-2-BK-R	Black	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-2-BK-R	Black	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-BK	Black	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-BL	Blue	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-BL	Blue	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-BL	Blue	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-BL	Blue	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-BL	Blue	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-BL	Blue	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-BL	Blue	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-BL	Blue	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-GR	Green	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-GR	Green	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-GR	Green	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-GR	Green	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-GR	Green	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-GR	Green	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-GR	Green	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-GR	Green	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-OR	Orange	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-OR	Orange	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-OR	Orange	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-OR	Orange	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-OR	Orange	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-OR	Orange	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-OR	Orange	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-OR	Orange	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-1-OR	Orange	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-OR	Orange	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-RD	Red	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-RD	Red	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-RD	Red	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-RD	Red	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-RD	Red	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-RD	Red	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-RD	Red	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-RD	Red	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-RD	Red	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-RD	Red	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-PK	Pink	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-PK	Pink	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-PK	Pink	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-VT	Violet	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-VT	Violet	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-GY	Gray	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-GY	Gray	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-BR	Brown	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6710-WT
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-BR	Brown	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6710-WT

**  **WARNING:** Cancer www.P65Warnings.ca.gov

Wire and Cable Materials

PermaSleeve® PSHT High-Heat Wire Markers (B-345)

2:1 heat-shrinkable wire marking sleeves specifically designed for high-temperature and low-vacuum outgassing applications. Made from irradiated high-temperature PVDF. Temp. range: -67° F to 437° F (-55° C to 225° C). RoHS compliant and UL recognized.

Meets specifications:

- NASA SP-R-0022A Outgassing Performance
- SAE-AS-81531
- MIL-STD-202

Tested per:

- SAE-AMS-DTL-23053/18, Class 2
- ASTM E162
- ASTM E662




Figure 44



Fits Printers	Figure	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Recovered Diameter Inch (mm)	Sleeve Width A Inch (mm)	Qty. Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 44	PSHT-094-1-WT	White	26 to 18	0.031 (0.8)	0.080 (2)	0.094 (2.4)	0.031 (0.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-094-175-WT	White	26 to 18	0.031 (0.8)	0.080 (2)	0.094 (2.4)	0.031 (0.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-1-WT	White	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-175-WT	White	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-187-1-WT	White	16 to 12	0.094 (2.4)	0.150 (3.8)	0.187 (4.8)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-187-175-WT	White	16 to 12	0.094 (2.4)	0.150 (3.8)	0.187 (4.8)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-250-1-WT	White	14 to 8	0.125 (3.2)	0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-250-175-WT	White	14 to 8	0.125 (3.2)	0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-375-1-WT	White	10 to 6	0.187 (4.7)	0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-375-175-WT	White	10 to 6	0.187 (4.7)	0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-500-1-WT	White	8 to 1	0.250 (6.4)	0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-500-175-WT	White	8 to 1	0.250 (6.4)	0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-750-1-WT	White	4	0.375 (9.5)	0.700 (17.8)	0.750 (19.1)	0.375 (9.5)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-750-175-WT	White	4	0.375 (9.5)	0.700 (17.8)	0.750 (19.1)	0.375 (9.5)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-1000-1-WT	White	-	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.450 (11.4)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-1000-175-WT	White	-	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.450 (11.4)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-094-1-YL	Yellow	26 to 18	0.031 (0.8)	0.080 (2)	0.094 (2.4)	0.031 (0.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-094-175-YL	Yellow	26 to 18	0.031 (0.8)	0.080 (2)	0.094 (2.4)	0.031 (0.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-1-YL	Yellow	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-175-YL	Yellow	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-250-1-YL	Yellow	14 to 8	0.125 (3.2)	0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-250-175-YL	Yellow	14 to 8	0.125 (3.2)	0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-187-1-YL	Yellow	16 to 12	0.094 (2.4)	0.150 (3.8)	0.187 (4.8)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-187-175-YL	Yellow	16 to 12	0.094 (2.4)	0.150 (3.8)	0.187 (4.8)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-375-1-YL	Yellow	10 to 6	0.187 (4.7)	0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-375-175-YL	Yellow	10 to 6	0.187 (4.7)	0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-500-1-YL	Yellow	8 to 1	0.250 (6.4)	0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-500-175-YL	Yellow	8 to 1	0.250 (6.4)	0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-750-1-YL	Yellow	4	0.375 (9.5)	0.700 (17.8)	0.750 (19.1)	0.375 (9.5)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-750-175-YL	Yellow	4	0.375 (9.5)	0.700 (17.8)	0.750 (19.1)	0.375 (9.5)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-1000-1-YL	Yellow	-	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.450 (11.4)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-1000-175-YL	Yellow	-	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.450 (11.4)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-1-BK	Black	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.000 (25.4)	100	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-1-BL	Blue	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.000 (25.4)	100	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-175-BL	Blue	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.750 (44.5)	100	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 44	PSHT-187-175-BL	Blue	16 to 12	0.094 (2.4)	0.150 (3.8)	0.187 (4.8)	0.094 (2.4)	1.750 (44.5)	100	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 44	PSHT-125-1-PK	Pink	20 to 16	0.063 (1.6)	0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	1.000 (25.4)	100	M61-R6610

Wire and Cable Materials

Terminal Block and Patch Panel Adhesive Strips (B-422, B-428, B-430, B-483 and B-498)

When using terminal block mode, printer can serialize and pre-space to your special thin widths to fit terminal blocks.

- **B-422 Glossy Polyester Material:** Permanent adhesive, good for powder-coated and textured surfaces. Best on flat surfaces. Temp. range: -40° F to 212° F (-40° C to 100° C). UL recognized
- **B-428 Metallized Polyester Material:** Permanent adhesive, silver finish. Temp. range: -40° F to 176° F (-40° C to 80° C). UL recognized
- **B-430 Clear Glossy Polyester Material:** Translucent, high performance polyester material with a glossy finish. Non-colored label with permanent adhesive. Good for general purpose thermal transfer printing
- **B-483 Polyester Material:** Permanent adhesive for powder-coated and textured surfaces. Best on flat surfaces. Temp. range: -40° F to 248° F (-40° C to 120° C). UL recognized
- **B-498 Repositionable Vinyl Cloth:** Adhesive and cloth backing offers excellent holding power, yet allow for clean removal and repositioning if necessary. Temp. range -40° F to 175° F (-40° C to 70° C). UL recognized

Improved registration! The M61C- parts below come on a notched liner which helps the BMP61 printer achieve improved registration.


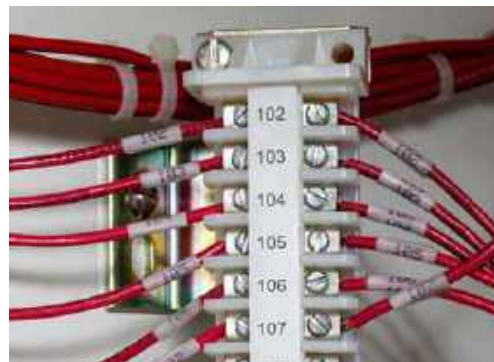


Figure 30




Figure 33




Figure 34
w/ perforations

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-422 Polyester									
M611, BMP61, 71*	Fig. 33	M61C-375-422	B-422	Polyester	White	0.375 (9.53)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*	Fig. 33	M61C-475-422	B-422	Polyester	White	0.475 (12.07)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*	Fig. 33	M61C-500-422	B-422	Polyester	White	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*	Fig. 33	M61C-625-422	B-422	Polyester	White	0.625 (15.88)	50 (15.24)	1 roll (cont.)	M61-R6010
B-428 Metallized Polyester									
M611, BMP61, 71*	Fig. 33	M61C-500-428	B-428	Polyester	Light Gray	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R4310
B-430 Clear Polyester									
M611, BMP61, 71*	Fig. 33	M61C-375-430	B-430	Polyester	Clear	0.375 (9.53)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*	Fig. 33	M61C-500-430	B-430	Polyester	Clear	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
B-483 Ultra-Aggressive Polyester									
M611, BMP61, 71*	Fig. 30	M61C-500-483	B-483	Polyester	White	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
B-498 Repositionable Vinyl Cloth									
M611, BMP61, 71*	Fig. 30	M61C-240-498	B-498	Vinyl Cloth	White	0.240 (6.1)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	PTLTB-498-240	B-498	Vinyl Cloth	White	0.240 (6.1)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	BPTLTB-498-240	B-498	Vinyl Cloth	White	0.240 (6.1)	300 (91.44)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*	Fig. 30	M61C-318-498	B-498	Vinyl Cloth	White	0.318 (8.08)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	PTLTB-498-318	B-498	Vinyl Cloth	White	0.318 (8.08)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	BPTLTB-498-318	B-498	Vinyl Cloth	White	0.318 (8.08)	300 (91.44)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*	Fig. 30	M61C-375-498	B-498	Vinyl Cloth	White	0.375 (9.53)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	PTLTB-498-375	B-498	Vinyl Cloth	White	0.375 (9.53)	30 (9.14)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	BPTLTB-498-375	B-498	Vinyl Cloth	White	0.375 (9.53)	300 (91.44)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 30	PTLTB-8-498	B-498	Vinyl Cloth	White	0.500 (12.7)	30 (9.14)	1 roll (cont.)	M61-R4310

Raised Panel Materials

Raised Panel and Push-Button Labels (B-593)

Glossy, foam-backed polyester with permanent adhesive and solvent resistance makes them a great replacement for engraved tags. Ideal for external push buttons, switches and internal connection points. Total label thickness: 0.0256 in. (0.650 mm). RoHS compliant and UL approved.




Figure 2




Figure 49



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Hole Dia Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
Push button format										
M611, BMP61, 71", TLS	Fig. 49	PTLEP-167-593	B-593	Polyester	White	1.200 (30.48)	1.500 (38.1)	0.886 (22.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-168-593	B-593	Polyester	White	1.200 (30.48)	1.900 (48.3)	0.886 (22.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-169-593	B-593	Polyester	White	1.800 (45.72)	1.800 (45.7)	1.201 (30.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-167-593-YL	B-593	Polyester	Yellow	1.200 (30.48)	1.500 (38.1)	0.886 (22.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-168-593-YL	B-593	Polyester	Yellow	1.200 (30.48)	1.900 (48.3)	0.886 (22.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-169-593-YL	B-593	Polyester	Yellow	1.800 (45.72)	1.800 (45.7)	1.201 (30.5)	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 49	PTLEP-167-593-RD	B-593	Polyester	Red	1.200 (30.48)	1.500 (38.1)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-168-593-RD	B-593	Polyester	Red	1.200 (30.48)	1.900 (48.3)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-169-593-RD	B-593	Polyester	Red	1.800 (45.72)	1.800 (45.7)	1.201 (30.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-167-593-GN	B-593	Polyester	Green	1.200 (30.48)	1.500 (38.1)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-168-593-GN	B-593	Polyester	Green	1.200 (30.48)	1.900 (48.3)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-169-593-GN	B-593	Polyester	Green	1.800 (45.72)	1.800 (45.7)	1.201 (30.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-167-593-BK	B-593	Polyester	Black	1.200 (30.48)	1.500 (38.1)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-168-593-BK	B-593	Polyester	Black	1.200 (30.48)	1.900 (48.3)	0.886 (22.5)	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 49	PTLEP-169-593-BK	B-593	Polyester	Black	1.800 (45.72)	1.800 (45.7)	1.201 (30.5)	100	M61-R4410-WT
Rectangular format										
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593	B-593	Polyester	White	1.000 (25.4)	2.000 (50.8)	-	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-176-593	B-593	Polyester	White	1.000 (25.4)	3.000 (76.2)	-	50	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593	B-593	Polyester	White	1.000 (25.4)	4.000 (101.6)	-	50	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593	B-593	Polyester	White	1.060 (26.9)	0.490 (12.4)	-	200	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593-YL	B-593	Polyester	Yellow	1.000 (25.4)	2.000 (50.8)	-	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-176-593-YL	B-593	Polyester	Yellow	1.000 (25.4)	3.000 (76.2)	-	50	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593-YL	B-593	Polyester	Yellow	1.000 (25.4)	4.000 (101.6)	-	50	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593-YL	B-593	Polyester	Yellow	1.060 (26.9)	0.490 (12.4)	-	200	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593-RD	B-593	Polyester	Red	1.000 (25.4)	2.000 (50.8)	-	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-176-593-RD	B-593	Polyester	Red	1.000 (25.4)	3.000 (76.2)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593-RD	B-593	Polyester	Red	1.000 (25.4)	4.000 (101.6)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593-RD	B-593	Polyester	Red	1.060 (26.9)	0.490 (12.4)	-	200	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593-GN	B-593	Polyester	Green	1.000 (25.4)	2.000 (50.8)	-	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-176-593-GN	B-593	Polyester	Green	1.000 (25.4)	3.000 (76.2)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593-GN	B-593	Polyester	Green	1.000 (25.4)	4.000 (101.6)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593-GN	B-593	Polyester	Green	1.060 (26.9)	0.490 (12.4)	-	200	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593-SL	B-593	Polyester	Silver	1.000 (25.4)	2.000 (50.8)	-	100	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593-SL	B-593	Polyester	Silver	1.000 (25.4)	4.000 (101.6)	-	50	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593-SL	B-593	Polyester	Silver	1.060 (26.9)	0.490 (12.4)	-	200	M61-R6010
M611, BMP61, 71", TLS	Fig. 2	PTLEP-173-593-BK	B-593	Polyester	Black	1.000 (25.4)	2.000 (50.8)	-	100	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-176-593-BK	B-593	Polyester	Black	1.000 (25.4)	3.000 (76.2)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-174-593-BK	B-593	Polyester	Black	1.000 (25.4)	4.000 (101.6)	-	50	M61-R4410-WT
M611, BMP61, 71", TLS	Fig. 2	PTLEP-171-593-BK	B-593	Polyester	Black	1.060 (26.9)	0.490 (12.4)	-	200	M61-R4410-WT

Due to the rigid nature of B-593 material, labels feed into the printer through the bulk media slot at the top.



Asset Tracking Materials

Metallized Asset Tracking Labels (B-428, B-435 and B-486)

- **B-428 Metallized Polyester Material:** Permanent adhesive, silver finish. Temp. range: -40° F to 176° F (-40° C to 80° C). UL recognized
- **B-435 Glossy Metallized Polyester Material:** Withstands numerous solvents and variable temps. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish
- **B-486 Ultra-Aggressive Metallized Polyester Material:** High adhesion to textured metals, powder-coated surfaces and low-surface energy plastics. Withstands numerous solvents and variable temps
- **B-8591 Outdoor Polyester Material:** Permanent adhesive, 12-year outdoor durability, resists UV, abrasion and fluids




Figure 2




Figure 33




Figure 40
w/ overlaminate




Figure 46
w/ black border




Figure 51





Figure 54

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-428 Metallized Polyester									
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-428	B-428	Polyester	Light Gray	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 51	PTL-30-428-CALI	B-428	Polyester	Light Gray	0.750 (19.05)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-15-428	B-428	Polyester	Light Gray	1.000 (25.4)	0.275 (7)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-428	B-428	Polyester	Light Gray	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-17-428	B-428	Polyester	Light Gray	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-22-428	B-428	Polyester	Light Gray	1.000 (25.4)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 46	PTL-24-428-BK	B-428	Polyester	Light Gray	1.130 (28.7)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-26-428	B-428	Polyester	Light Gray	1.250 (31.75)	2.750 (69.9)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-26-428	B-428	Polyester	Light Gray	1.250 (31.8)	2.750 (69.85)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-428	B-428	Polyester	Light Gray	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 54	PTL-35-428-PROP	B-428	Polyester	Light Gray	1.630 (41.4)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-50-428	B-428	Polyester	Light Gray	1.650 (41.9)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-428	B-428	Polyester	Light Gray	1.900 (48.3)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-428	B-428	Polyester	Light Gray	1.900 (48.3)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-20-428	B-428	Polyester	Light Gray	2.000 (50.8)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-428	B-428	Polyester	Light Gray	2.000 (50.8)	1.000 (25.4)	100	M61-R4310
B-435 Glossy Metallized Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-435	B-435	Polyester	Silver	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-435	B-435	Polyester	Silver	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-435	B-435	Polyester	Silver	1.500 (38.1)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-435	B-435	Polyester	Silver	1.500 (38.1)	0.750 (19.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-435	B-435	Polyester	Silver	1.500 (38.1)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-435	B-435	Polyester	Silver	1.500 (38.1)	1.500 (38.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-435	B-435	Polyester	Silver	1.900 (48.3)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-435	B-435	Polyester	Silver	1.900 (48.3)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-435	B-435	Polyester	Silver	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
B-486 Ultra-Aggressive Metallized Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-486	B-486	Polyester	Light Gray	1.000 (25.4)	0.375 (9.5)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-486	B-486	Polyester	Light Gray	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-486	B-486	Polyester	Light Gray	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 46	PTL-24-486-BK	B-486	Polyester	Light Gray	1.130 (28.7)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-486	B-486	Polyester	Light Gray	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-486	B-486	Polyester	Light Gray	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-486	B-486	Polyester	Light Gray	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-486	B-486	Polyester	Light Gray	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-486	B-486	Polyester	Light Gray	1.900 (48.3)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-486	B-486	Polyester	Light Gray	1.900 (48.3)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-486	B-486	Polyester	Light Gray	2.000 (50.8)	1.000 (25.4)	100	M61-R4310
B-8591 Outdoor Polyester									
M611, BMP61	Fig. 2	M61-196-8591-SL	B-8591	Polyester	Silver	1.180 (30.0)	1.970 (50.0)	100	M61-R6610

Asset Tracking Materials

Non-Metallized Asset Tracking Labels (B-422, B-423, B-430 and B-483)

- **B-422 Polyester Material:** Permanent adhesive, good for powder-coated and textured surfaces. Temp. range: -40° F to 212° F (-40° C to 100° C). UL recognized
- **B-423 Glossy White Polyester Material:** UL recognized for outdoor use on glass, thermoset polyester plastic and polyvinyl fluoride plastic
- **B-430 Clear Polyester Material:** High-performance glossy polyester material with permanent adhesive. Good for general purpose thermal transfer printing
- **B-483 Ultra-Aggressive Polyester Material:** Permanent adhesive for powder-coated and textured surfaces. Temp. range: -40° F to 248° F (-40° C to 120° C). UL recognized
- **B-8459 Polyester Material:** Permanent adhesive, excellent resistance to most chemicals, oils and water. Temp. range: -40° F to 212° F (-40° C to 100° C). UL recognized
- **B-8591 Outdoor Polyester Material:** Permanent adhesive, 12-year outdoor durability, resists UV, abrasion and fluids

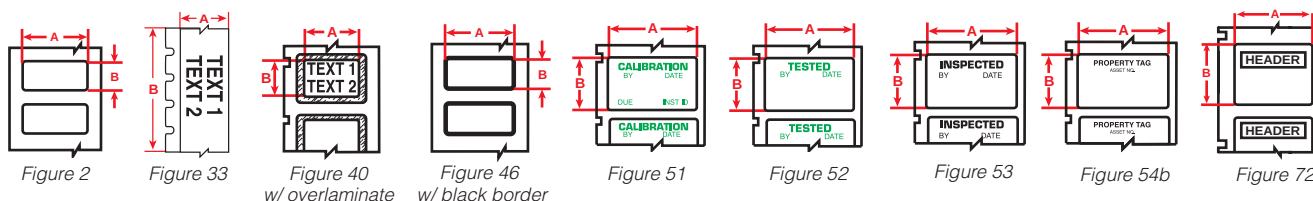

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-422 Permanent Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-39-422	B-422	Polyester	White	0.375 (9.53)	0.600 (15.2)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-46-422	B-422	Polyester	White	0.375 (9.53)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-5-422	B-422	Polyester	White	0.500 (12.7)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-44-422	B-422	Polyester	White	0.500 (12.7)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-7-422	B-422	Polyester	White	0.500 (12.7)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-422	B-422	Polyester	White	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-422	B-422	Polyester	White	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-422	B-422	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-422	B-422	Polyester	White	1.000 (25.4)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-22-422	B-422	Polyester	White	1.000 (25.4)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-23-422	B-422	Polyester	White	1.000 (25.4)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-422	B-422	Polyester	White	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-45-422	B-422	Polyester	White	1.500 (38.1)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-422	B-422	Polyester	White	1.500 (38.1)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-422	B-422	Polyester	White	1.500 (38.1)	0.750 (19.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-422	B-422	Polyester	White	1.500 (38.1)	1.500 (38.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 54	PTL-35-422-PROP	B-422	Polyester	White	1.630 (41.4)	0.750 (19.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-422	B-422	Polyester	White	1.900 (48.26)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-422	B-422	Polyester	White	1.900 (48.3)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-422	B-422	Polyester	White	1.900 (48.3)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-422	B-422	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
B-422 PermsShield Polyester with overlamine layer									
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-17-422	B-422	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-26-422	B-422	Polyester	White	1.250 (31.8)	2.750 (69.85)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-50-422	B-422	Polyester	White	1.650 (41.9)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-20-422	B-422	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
B-423 Glossy Permanent Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-1-423	B-423	Polyester	White	0.250 (6.35)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-3-423	B-423	Polyester	White	0.375 (9.53)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-4-423	B-423	Polyester	White	0.400 (10.2)	0.400 (10.2)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-5-423	B-423	Polyester	White	0.500 (12.7)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-6-423	B-423	Polyester	White	0.500 (12.7)	0.275 (7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-7-423	B-423	Polyester	White	0.500 (12.7)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-423	B-423	Polyester	White	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-9-423	B-423	Polyester	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-423	B-423	Polyester	White	0.750 (19.05)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-13-423	B-423	Polyester	White	0.900 (22.86)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-14-423	B-423	Polyester	White	1.000 (25.4)	0.187 (4.7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-15-423	B-423	Polyester	White	1.000 (25.4)	0.275 (7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-423	B-423	Polyester	White	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 51	PTL-30-423-CALI	B-423	Polyester	White	1.500 (38.1)	0.750 (19.05)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 52	PTL-30-423-TEST	B-423	Polyester	White	1.500 (38.1)	0.750 (19.05)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 53	PTL-30-423-INSP	B-423	Polyester	White	1.500 (38.1)	0.750 (19.05)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-423	B-423	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-423	B-423	Polyester	White	1.000 (25.4)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-22-423	B-423	Polyester	White	1.000 (25.4)	3.000 (76.2)	100	M61-R6010

Non-Metallized Asset Tracking Labels (continued)

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 2	PTL-23-423	B-423	Polyester	White	1.000 (25.4)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 46	PTL-24-423-BK	B-423	Polyester	White	1.130 (28.7)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-25-423	B-423	Polyester	White	1.250 (31.75)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-26-423	B-423	Polyester	White	1.250 (31.75)	2.750 (69.9)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-27-423	B-423	Polyester	White	1.500 (38.1)	0.125 (3.2)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-423	B-423	Polyester	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-423	B-423	Polyester	White	1.500 (38.1)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 2	M61-30-423	B-423	Polyester	White	1.500 (38.1)	0.750 (19.05)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-423	B-423	Polyester	White	1.500 (38.1)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-423	B-423	Polyester	White	1.500 (38.1)	1.500 (38.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 54	PTL-35-423-PROP	B-423	Polyester	White	1.630 (41.4)	0.750 (19.1)	250	M61-R6010
M611, BMP61	Fig. 2	M61-52-423	B-423	Polyester	White	1.900 (48.3)	0.600 (15.2)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-423	B-423	Polyester	White	1.900 (48.3)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-423	B-423	Polyester	White	1.900 (48.3)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-2-423	B-423	Polyester	White	2.000 (50.8)	0.250 (6.4)	100	M61-R6010
M611, BMP61	Fig. 2	M61-61-423	B-423	Polyester	White	2.000 (50.8)	0.500 (12.7)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-423	B-423	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
B-430 Clear Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-71-430	B-430	Polyester	Clear	0.350 (8.89)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 34	PTL-39-430	B-430	Polyester	Clear	0.375 (9.53)	0.600 (15.2)	750	M61-R6010
M611, BMP61	Fig. 33	M61C-375-430	B-430	Polyester	Clear	0.375 (9.53)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-46-430	B-430	Polyester	Clear	0.375 (9.53)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-6-430	B-430	Polyester	Clear	0.500 (12.7)	0.275 (7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-44-430	B-430	Polyester	Clear	0.500 (12.7)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-7-430	B-430	Polyester	Clear	0.500 (12.7)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 33	M61C-500-430	B-430	Polyester	Clear	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-430	B-430	Polyester	Clear	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 2	M61-9-430	B-430	Polyester	Clear	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61	Fig. 2	M61-10-430	B-430	Polyester	Clear	0.750 (19.05)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-430	B-430	Polyester	Clear	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61	Fig. 2	M61-98-430	B-430	Polyester	Clear	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-430	B-430	Polyester	Clear	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 2	M61-22-430	B-430	Polyester	Clear	1.000 (25.4)	1.000 (25.4)	100	M61-R6010
M611, BMP61	Fig. 2	M61-37-430	B-430	Polyester	Clear	1.000 (25.4)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-430	B-430	Polyester	Clear	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 2	M61-198-430	B-430	Polyester	Clear	1.250 (31.75)	2.750 (69.9)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-430	B-430	Polyester	Clear	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-45-430	B-430	Polyester	Clear	1.500 (38.1)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-430	B-430	Polyester	Clear	1.500 (38.1)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 2	M61-30-430	B-430	Polyester	Clear	1.500 (38.1)	0.750 (19.05)	250	M61-R6010
M611, BMP61	Fig. 2	M61-52-430	B-430	Polyester	Clear	1.900 (48.26)	0.600 (15.2)	250	M61-R6010
M611, BMP61	Fig. 2	M61-78-430	B-430	Polyester	Clear	1.900 (48.26)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-430	B-430	Polyester	Clear	1.900 (48.26)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 2	M61-61-430	B-430	Polyester	Clear	2.000 (50.8)	0.500 (12.7)	100	M61-R6010
B-483 Ultra-Aggressive Polyester									
M611, BMP61, 71*, TLS	Fig. 33	PTL-101-483	B-483	Polyester	White	0.250 (6.35)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-61-483	B-483	Polyester	White	0.500 (12.7)	2.000 (50.8)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-483	B-483	Polyester	White	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-62-483	B-483	Polyester	White	0.750 (19.05)	4.000 (101.6)	50	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-63-483	B-483	Polyester	White	0.750 (19.05)	8.000 (203.2)	50	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-483	B-483	Polyester	White	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-483	B-483	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-483	B-483	Polyester	White	1.000 (25.4)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-483	B-483	Polyester	White	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 46	PTL-24-483-BK	B-483	Polyester	White	1.130 (28.7)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-100-483	B-483	Polyester	White	1.300 (33.02)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-65-483	B-483	Polyester	White	1.375 (34.93)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-483	B-483	Polyester	White	1.500 (38.1)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-483	B-483	Polyester	White	1.500 (38.1)	0.750 (19.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-483	B-483	Polyester	White	1.500 (38.1)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-483	B-483	Polyester	White	1.500 (38.1)	1.500 (38.1)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-483	B-483	Polyester	White	1.900 (48.26)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-483	B-483	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-483	B-483	Polyester	White	1.900 (48.3)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 72	PTL-37-483-WARNING	B-483	Polyester	White	1.900 (48.3)	3.000 (76.2)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-23-483	B-483	Polyester	White	1.000 (25.4)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-483	B-483	Polyester	White	1.900 (48.3)	4.000 (101.6)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 72	PTL-38-483-WARNING	B-483	Polyester	White	1.900 (48.3)	4.000 (101.6)	100	M61-R6010
B-8459 Adhesive Polyester									
M611, BMP61	Fig. 2	M61-9-8459	B-8459	Polyester	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61	Fig. 2	M61-17-8459	B-8459	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 2	M61-29-8459	B-8459	Polyester	White	1.500 (38.10)	0.500 (12.7)	500	M61-R6010
M611, BMP61	Fig. 2	M61-30-8459	B-8459	Polyester	White	1.500 (38.10)	0.750 (19.05)	250	M61-R6010
B-8591 Outdoor Polyester									
M611, BMP61	Fig. 2	M61-196-8591	B-8591	Polyester	White	1.180 (30.0)	1.970 (50.0)	100	M61-R6610
M611, BMP61	Fig. 33	M61C-1900-8591	B-8591	Polyester	White	1.900 (48.3)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6610
M611, BMP61	Fig. 33	M61C-1000-8591	B-8591	Polyester	White	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6610

Circuit Board Materials

Static Dissipative Labels (B-473, B-717, B-718 and B-719)

Low-profile polyimide and polyester materials that have static dissipative properties. Primarily used for circuit board and electronic components labeling.

- **B-473 Electrostatic Dissipative Polyester Material:** White glossy polyester with a permanent static dissipative adhesive and liner
- **B-717 Electrostatic Dissipative Polyimide Material:** High-temperature white glossy polyimide material (2 mil) with a permanent static dissipative adhesive and liner for PCB identification
- **B-718 Glossy Low Profile Electrostatic Dissipative Polyimide Material:** High-temperature, low-profile white glossy polyimide material (1 mil) with a permanent static dissipative adhesive and liner for PCB identification
- **B-719 Matte Low-Profile Electrostatic Dissipative Polyimide Material:** High-temperature, low-profile white matte polyimide material (1 mil) with a permanent static dissipative adhesive and liner




Figure 2




Figure 41

Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-473 Glossy White Electrostatic Dissipative Polyester									
M611, BMP61, 71*, TLS	Fig. 2	** PTL-1-473	B-473	Polyester	White	0.250 (6.35)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-5-473	B-473	Polyester	White	0.500 (12.7)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-6-473	B-473	Polyester	White	0.500 (12.7)	0.275 (7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-9-473	B-473	Polyester	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-10-473	B-473	Polyester	White	0.750 (19.05)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-16-473	B-473	Polyester	White	1.000 (25.4)	0.375 (9.5)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 41	** PTL-17-473	B-473	Polyester	Black on Yellow	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-17-473	B-473	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-28-473	B-473	Polyester	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
B-717 Glossy White Static Dissipative Polyimide									
M611, BMP61, 71*, TLS	Fig. 2	** PTL-10-717	B-717	Polyimide	White	0.250 (6.35)	0.750 (19.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-3-717	B-717	Polyimide	White	0.375 (9.53)	0.375 (9.53)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-1-717	B-717	Polyimide	White	0.375 (9.53)	1.000 (25.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-9-717	B-717	Polyimide	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-25-717	B-717	Polyimide	White	1.250 (31.75)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-27-717	B-717	Polyimide	White	1.500 (38.1)	0.125 (3.2)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-28-717	B-717	Polyimide	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-14-717	B-717	Polyimide	White	2.000 (50.8)	0.187 (4.7)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-2-717	B-717	Polyimide	White	2.000 (50.8)	0.250 (6.35)	100	M61-R6010
B-718 Glossy White Low-Profile Static Dissipative Polyimide									
M611, BMP61, 71*, TLS	Fig. 2	** PTL-14-718	B-718	Polyimide	White	0.187 (4.7)	3.000 (76.2)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-10-718	B-718	Polyimide	White	0.250 (6.35)	0.750 (19.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-3-718	B-718	Polyimide	White	0.375 (9.53)	0.375 (9.53)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-1-718	B-718	Polyimide	White	0.375 (9.53)	1.000 (25.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-16-718	B-718	Polyimide	White	0.375 (9.53)	1.000 (25.4)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-4-718	B-718	Polyimide	White	0.400 (10.2)	0.400 (10.2)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-6-718	B-718	Polyimide	White	0.500 (12.7)	0.275 (6.98)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-9-718	B-718	Polyimide	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-13-718	B-718	Polyimide	White	0.900 (22.86)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-28-718	B-718	Polyimide	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
B-719 Matte White Low-Profile Static Dissipative Polyimide									
M611, BMP61, 71*, TLS	Fig. 2	** PTL-10-719	B-719	Polyimide	White	0.250 (6.35)	0.750 (19.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-16-719	B-719	Polyimide	White	0.375 (9.53)	1.000 (25.4)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-4-719	B-719	Polyimide	White	0.400 (10.2)	0.400 (10.2)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-6-719	B-719	Polyimide	White	0.500 (12.7)	0.275 (6.98)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-17-719	B-719	Polyimide	White	0.500 (12.7)	3.000 (76.2)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-9-719	B-719	Polyimide	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-13-719	B-719	Polyimide	White	0.900 (22.86)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	** PTL-28-719	B-719	Polyimide	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010

Circuit Board Materials

High-Temperature Polyimide Labels (B-724 and B-727)

Low-profile polyimide and polyester materials that have static dissipative properties. Primarily used for circuit board and electronic component labeling.

- **B-724 Amber Polyimide Material:** Matte polyimide with permanent adhesive; can survive on the top or bottom side of PCBs through the solder process
- **B-727 White Polyimide Material:** Glossy polyimide with permanent adhesive; withstands wave solder environments for printed circuit board and electronic component preprocess labeling




Figure 2



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-724 Matte Polyimide Material									
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-724	B-724	Polyimide	Amber	0.250 (6.35)	0.750 (19.1)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-3-724	B-724	Polyimide	Amber	0.375 (9.53)	0.375 (9.53)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-1-724	B-724	Polyimide	Amber	0.375 (9.53)	1.000 (25.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-724	B-724	Polyimide	Amber	0.375 (9.53)	1.000 (25.4)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-4-724	B-724	Polyimide	Amber	0.400 (10.2)	0.400 (10.2)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-6-724	B-724	Polyimide	Amber	0.500 (12.7)	0.275 (6.98)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-724	B-724	Polyimide	Amber	0.500 (12.7)	4.000 (101.6)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-9-724	B-724	Polyimide	Amber	0.650 (16.51)	0.200 (5.1)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-13-724	B-724	Polyimide	Amber	0.900 (22.86)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-25-724	B-724	Polyimide	Amber	1.250 (31.75)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-27-724	B-724	Polyimide	Amber	1.500 (38.1)	0.125 (3.2)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-724	B-724	Polyimide	Amber	1.500 (38.1)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-2-724	B-724	Polyimide	Amber	2.000 (50.8)	0.250 (6.35)	100	M61-R4310
B-727 Glossy Polyimide Material									
M611, BMP61, 71*, TLS	Fig. 2	PTL-14-727	B-727	Polyimide	White	0.187 (4.7)	4.000 (101.6)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-727	B-727	Polyimide	White	0.250 (6.35)	0.750 (19.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-3-727	B-727	Polyimide	White	0.375 (9.53)	0.375 (9.53)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-1-727	B-727	Polyimide	White	0.375 (9.53)	1.000 (25.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-727	B-727	Polyimide	White	0.375 (9.53)	1.000 (25.4)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-4-727	B-727	Polyimide	White	0.400 (10.2)	0.400 (10.2)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-6-727	B-727	Polyimide	White	0.500 (12.7)	0.275 (6.98)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-9-727	B-727	Polyimide	White	0.650 (16.51)	0.200 (5.1)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-13-727	B-727	Polyimide	White	0.900 (22.86)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-28-727	B-727	Polyimide	White	1.500 (38.1)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-2-727	B-727	Polyimide	White	2.000 (50.8)	0.250 (6.35)	100	M61-R6010

Bulk parts for high volume printing

Bulk label parts offer a cost-effective solution for high volume printing with the BMP®61 printer. Look for material catalog numbers that begin with "BM71-" or "BPTL".

**Bulk label printing requires the media feeder and smart cell spool which are included in the bulk material packaging.*



General ID Materials

General ID Polyester Labels (B-432, B-459, B-488 and B-489)

- **B-432 Clear Polyester Material:** High-performance glossy polyester, good adherence for rough surface applications.
- **B-459 Permanent Polyester Material:** White matte polyester with permanent adhesive
- **B-488 Ultra-Aggressive Polyester Material:** White matte polyester with an aggressive adhesive
- **B-489 Ultra-Aggressive Polyester Material:** White matte polyester with an aggressive adhesive




Figure 2




Figure 33



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-432 Clear Polyester									
M611, BMP61, 71*, TLS	Fig. 33	PTL-101-432	B-432	Polyester	Clear	0.250 (6.35)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-11-432	B-432	Polyester	Clear	0.500 (12.7)	0.750 (19.1)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-432	B-432	Polyester	Clear	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-10-432	B-432	Polyester	Clear	0.750 (19.05)	0.250 (6.4)	750	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-432	B-432	Polyester	Clear	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-432	B-432	Polyester	Clear	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-432	B-432	Polyester	Clear	1.900 (48.26)	50 ft. (15.24 m)	1 roll (cont.)	M61-R6010
B-459 Permanent Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-459	B-459	Polyester	White	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-459	B-459	Polyester	White	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-459	B-459	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R4310
B-488 Ultra-Aggressive Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-80-488	B-488	Polyester	White	0.750 (19.05)	0.900 (22.9)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-97-488	B-488	Polyester	White	0.900 (22.86)	0.900 (22.9)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-81-488	B-488	Polyester	White	1.900 (48.26)	0.250 (6.4)	750	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-78-488	B-488	Polyester	White	1.900 (48.26)	1.000 (25.4)	250	M61-R4310
B-489 Ultra-Aggressive Polyester									
M611, BMP61, 71*, TLS	Fig. 33	PTL-101-489	B-489	Polyester	White	0.250 (6.35)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-489	B-489	Polyester	White	0.500 (12.7)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-489	B-489	Polyester	White	1.000 (25.4)	0.375 (9.5)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-489	B-489	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-19-489	B-489	Polyester	White	1.000 (25.4)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-489	B-489	Polyester	White	1.000 (25.4)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-100-489	B-489	Polyester	White	1.300 (33.02)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-489	B-489	Polyester	White	1.500 (38.1)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-30-489	B-489	Polyester	White	1.500 (38.1)	0.750 (19.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-489	B-489	Polyester	White	1.500 (38.1)	1.000 (25.4)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-32-489	B-489	Polyester	White	1.500 (38.1)	1.500 (38.1)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-489	B-489	Polyester	White	1.900 (48.26)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-489	B-489	Polyester	White	1.900 (48.26)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-489	B-489	Polyester	White	1.900 (48.26)	50 ft. (15.24 m)	1 roll (cont.)	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-489	B-489	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R4310

Paper Labels (B-424)

White paper material with matte finish. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labeling applications.




Figure 2




Figure 40
w/ overlaminate



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 2	PTL-80-424	B-424	Paper	White	0.750 (19.05)	0.900 (22.9)	250	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-17-424	B-424	Paper	White	1.000 (25.4)	0.500 (12.7)	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-22-424	B-424	Paper	White	1.000 (25.4)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-424	B-424	Paper	White	1.900 (48.3)	3.000 (76.2)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-38-424	B-424	Paper	White	1.900 (48.3)	4.000 (101.6)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-424	B-424	Paper	White	2.000 (50.8)	1.000 (25.4)	100	M61-R4310
M611, BMP61, 71*, TLS	Fig. 40	PTPSL-20-424	B-424	Paper	White	2.000 (50.8)	1.000 (25.4)	100	M61-R4310

General ID Materials

General ID Vinyl Labels (B-439 and B-595)

Ideal for applications needing various colors such as lean / 5S, pipe markers, equipment and production area identification.

- **B-439 Vinyl:** Designed for use in ambient conditions with limited solvent exposure
- **B-595 Indoor / Outdoor Vinyl:** High-performance vinyl with permanent adhesive is very pliable and good for rough surfaces and outdoor use. 8-10 years average outdoor durability* Temp. range: -40° F to 180° F (-40° C to 82° C). UL recognized.



Figure 33



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-439 Vinyl									
M611, BMP61, 71*, TLS	Fig. 33	M61C-250-439	B-439	Vinyl	White	0.250 (6.35)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-375-439	B-439	Vinyl	White	0.375 (9.52)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439	B-439	Vinyl	White	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439	B-439	Vinyl	White	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439	B-439	Vinyl	White	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	M61C-250-439-YL	B-439	Vinyl	Yellow	0.250 (6.35)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-375-439-YL	B-439	Vinyl	Yellow	0.375 (9.52)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-YL	B-439	Vinyl	Yellow	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-YL	B-439	Vinyl	Yellow	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-YL	B-439	Vinyl	Yellow	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-OR	B-439	Vinyl	Orange	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-OR	B-439	Vinyl	Orange	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-OR	B-439	Vinyl	Orange	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-RD	B-439	Vinyl	Red	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-RD	B-439	Vinyl	Red	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-RD	B-439	Vinyl	Red	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-BL	B-439	Vinyl	Blue	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-BL	B-439	Vinyl	Blue	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-BL	B-439	Vinyl	Blue	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-GR	B-439	Vinyl	Green	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-GR	B-439	Vinyl	Green	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-GR	B-439	Vinyl	Green	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-8-439-BK	B-439	Vinyl	Black	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-42-439-BK	B-439	Vinyl	Black	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
M611, BMP61, 71*, TLS	Fig. 33	PTL-43-439-BK	B-439	Vinyl	Black	1.900 (48.26)	50 (15.24)	1 roll (cont.)	M61-R4410-WT
B-595 Indoor / Outdoor Vinyl									
M611, BMP61	Fig. 33	M61C-500-595-WT	B-595	Vinyl	White	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-WT	B-595	Vinyl	White	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-WT	B-595	Vinyl	White	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-CL	B-595	Vinyl	Clear	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-CL	B-595	Vinyl	Clear	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-CL	B-595	Vinyl	Clear	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-YL	B-595	Vinyl	Yellow	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-YL	B-595	Vinyl	Yellow	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-YL	B-595	Vinyl	Yellow	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-RD	B-595	Vinyl	Red	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-RD	B-595	Vinyl	Red	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-RD	B-595	Vinyl	Red	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-OR	B-595	Vinyl	Orange	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-OR	B-595	Vinyl	Orange	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-OR	B-595	Vinyl	Orange	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-GN	B-595	Vinyl	Green	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-GN	B-595	Vinyl	Green	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-GN	B-595	Vinyl	Green	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-BL	B-595	Vinyl	Blue	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-BL	B-595	Vinyl	Blue	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-BL	B-595	Vinyl	Blue	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-500-595-BK	B-595	Vinyl	Black	0.500 (12.7)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-BK	B-595	Vinyl	Black	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-BK	B-595	Vinyl	Black	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-LB	B-595	Vinyl	Light Blue	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-1000-595-GY	B-595	Vinyl	Gray	1.000 (25.4)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-GD	B-595	Vinyl	Gold	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-BR	B-595	Vinyl	Brown	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-595-PL	B-595	Vinyl	Purple	2.000 (50.8)	50 (15.24)	1 roll (cont.)	M61-R6010

* Average expected outdoor life of product will depend on user definition of failure, climatic conditions, mounting techniques and material color. The 8-10 year outdoor durability applies to the label stock only; ribbon durability will vary. Refer to the Technical Data Sheet at BradyID.com for performance characteristics.

General ID Materials

Reflective Material (B-584)

Reflective material shines back brightly when struck by light, making it ideal for labeling outdoor utility poles, hard hats, jobsite equipment and roof-top equipment. Meets Federal Spec L-S-300 for reflectivity. Average outdoor durability is 4-6 years.* Temp. range: -40° F to 158° F (-40° C to 70° C).



Figure 33



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length Feet (m)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61	Fig. 33	M61C-1000-584-OR	B-584	Reflective	Orange	1.000 (25.4)	30 (9.14)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-584-OR	B-584	Reflective	Orange	2.000 (50.8)	30 (9.14)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-584-YL	B-584	Reflective	Yellow	2.000 (50.8)	30 (9.14)	1 roll (cont.)	M61-R6010
M611, BMP61	Fig. 33	M61C-2000-584-SL	B-584	Reflective	Silver	2.000 (50.8)	30 (9.14)	1 roll (cont.)	M61-R6010

* Outdoor durability applies to the label stock only; ribbon durability will vary. Refer to the Technical Data Sheet at BradyID.com for performance characteristics.

Tamper-Indicating Labels (B-351, B-7546 and B-7576)

- **B-351 Destructible Vinyl Material:**
Destructible vinyl material prohibits one piece removal of label to indicate if the label has been tampered with
- **B-7546 VOID Footprint Polyester Material:**
Glossy white polyester leaves a "VOID" footprint when the label is removed to prevent it from being reused
- **B-7576 Metallized VOID Polyester Material:**
Matte white polyester leaves a "VOID" footprint when the label is removed. A "VOID" pattern will appear on the top surface of the label to prevent reuse




Figure 2



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
B-351 Destructible Vinyl									
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-351	B-351	Vinyl	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6210
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-351	B-351	Vinyl	White	1.000 (25.4)	2.000 (50.8)	100	M61-R6210
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-351	B-351	Vinyl	White	1.500 (38.1)	1.000 (25.4)	250	M61-R6210
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-351	B-351	Vinyl	White	1.900 (48.3)	3.000 (76.2)	100	M61-R6210
B-7546 VOID Footprint Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-17-7546	B-7546	Polyester	White	1.000 (25.4)	0.500 (12.7)	500	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-7546	B-7546	Polyester	White	1.500 (38.1)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-7546	B-7546	Polyester	White	2.000 (50.8)	1.000 (25.4)	100	M61-R6010
B-7576 Metallized VOID Polyester									
M611, BMP61, 71*, TLS	Fig. 2	PTL-20-7576	B-7576	Polyester	Silver	1.000 (25.4)	2.000 (50.8)	100	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-31-7576	B-7576	Polyester	Silver	1.500 (38.1)	1.000 (25.4)	250	M61-R6010
M611, BMP61, 71*, TLS	Fig. 2	PTL-37-7576	B-7576	Polyester	Silver	1.900 (48.3)	3.000 (76.2)	100	M61-R6010

Water-Dissolvable Paper Labels (B-403)

Labels completely dissolve in warm water within 30 seconds, leaving no adhesive residue, eliminating labor required for label removal and allows for easy re-identification.



Figure 33



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61	Fig. 33	M61C-750-403	B-403	Paper	White	0.750 (19.05)	50 (15.24)	1 roll (cont.)	M61-R4310
M611, BMP61	Fig. 33	M61C-1500-403	B-403	Paper	White	1.500 (38.1)	50 (15.24)	1 roll (cont.)	M61-R4310

Laboratory Materials

Color Polyester Labels (B-494)

Glossy white polyester with a color border printed on the label allows for differentiation of test specimens within user processes. Vial top labels are solid color. Material is resistant to common lab chemicals such as ethanol and xylene.




Figure 2




Figure 24



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Secondary Label Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61	Fig. 24	M61-98-494-BL	B-494	Polyester	Blue	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-BL	B-494	Polyester	Blue	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-BL	B-494	Polyester	Blue	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410
M611, BMP61	Fig. 24	M61-98-494-GN	B-494	Polyester	Green	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-GN	B-494	Polyester	Green	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-GN	B-494	Polyester	Green	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410
M611, BMP61	Fig. 24	M61-98-494-OR	B-494	Polyester	Orange	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-OR	B-494	Polyester	Orange	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-OR	B-494	Polyester	Orange	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410
M611, BMP61	Fig. 24	M61-98-494-PK	B-494	Polyester	Pink	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-PK	B-494	Polyester	Pink	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-PK	B-494	Polyester	Pink	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410
M611, BMP61	Fig. 24	M61-98-494-RD	B-494	Polyester	Red	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-RD	B-494	Polyester	Red	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-RD	B-494	Polyester	Red	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410
M611, BMP61	Fig. 24	M61-98-494-YL	B-494	Polyester	Yellow	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R6410
M611, BMP61	Fig. 2	M61-17-494-YL	B-494	Polyester	Yellow	1.000 (25.4)	0.500 (12.7)	-	500	M61-R6410
M611, BMP61	Fig. 2	M61-19-494-YL	B-494	Polyester	Yellow	1.000 (25.4)	1.000 (25.4)	-	250	M61-R6410

Nylon Cloth Lab Labels (B-499)

White nylon cloth designed for easy handling and conformability to tubes and vials. These labels withstand harsh temperatures and chemicals without falling off, fading or smearing.




Figure 2




Figure 24



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Secondary Label Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 2	PTL-11-499	B-499	Vinyl	White	0.500 (12.7)	0.750 (19.1)	-	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-16-499	B-499	Vinyl	White	0.375 (9.53)	1.000 (25.4)	-	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-29-499	B-499	Vinyl	White	0.500 (12.7)	1.500 (38.1)	-	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 24	PTL-117-499	B-499	Vinyl	White	0.900 (22.86)	0.500 (12.7)	0.500 (12.7) dia.	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-84-499	B-499	Vinyl	White	0.900 (22.86)	0.500 (12.7)	-	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 24	PTL-98-499	B-499	Vinyl	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R4310
M611, BMP61, 71*, TLS	Fig. 2	PTL-81-499	B-499	Vinyl	White	1.900 (48.26)	0.250 (6.4)	-	750	M61-R4310

Polypropylene Lab Labels (B-7425)

Material features moderate chemical resistance and is ideal for labeling dry, room temperature specimen containers. Chemical resistance to ethanol, DMSO, IPS, short term xylene, 10% formalin, 50% acetic acid and toluene. Temp. range: -196° C to 121° C (-320° F to 248° F).




Figure 2




Figure 24



Fits Printers	Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Secondary Label Inch (mm)	Labels Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61	Fig. 2	M61-2-7425	B-7425	Polypropylene	White	0.250 (6.35)	2.000 (50.8)	-	100	M61-R4310
M611, BMP61	Fig. 2	M61-7-7425	B-7425	Polypropylene	White	0.500 (12.7)	0.500 (12.7)	-	500	M61-R4310
M611, BMP61	Fig. 2	M61-18-7425	B-7425	Polypropylene	White	0.750 (19.1)	1.000 (25.4)	-	250	M61-R4310
M611, BMP61	Fig. 2	M61-17-7425	B-7425	Polypropylene	White	1.000 (25.4)	0.500 (12.7)	-	500	M61-R4310
M611, BMP61	Fig. 24	M61-98-7425	B-7425	Polypropylene	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	500	M61-R4310
M611, BMP61	Fig. 2	M61-199-7425	B-7425	Polypropylene	White	1.300 (33.0)	0.600 (15.2)	-	250	M61-R4310
M611, BMP61	Fig. 2	M61-31-7425	B-7425	Polypropylene	White	1.500 (38.1)	1.000 (25.4)	-	250	M61-R4310
M611, BMP61	Fig. 2	M61-121-7425	B-7425	Polypropylene	White	1.900 (48.3)	1.500 (38.1)	-	100	M61-R4310



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: byb@nt-rt.ru || сайт: <https://brady.nt-rt.ru/>